

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

KTCR11FX 1/4 Turn Straight Stop – Female Compression x Compression

Use: For use in potable water distribution systems in accessible locations only.


Design Features:

- **Machined brass ball** is specially engineered and mated with PTFE seats to provide smooth operation
- **Two high-performance o-rings** withstand high temperatures and corrosion
- **Machined brass body** provides strength, durability, and long-lasting performance
- **Blow-out proof brass stem** is assembled from the inside out with two o-rings to ensure safe, reliable performance
- **Plated stem** provides corrosion resistance and prevents o-ring damage
- **Metal handle** is designed for durability, corrosion resistance, and a sleek appearance
- **Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
- **100% leak tested**
- 

Operating Specifications:

Temperature: 40° - 180° F

Pressure: 125 PSI maximum

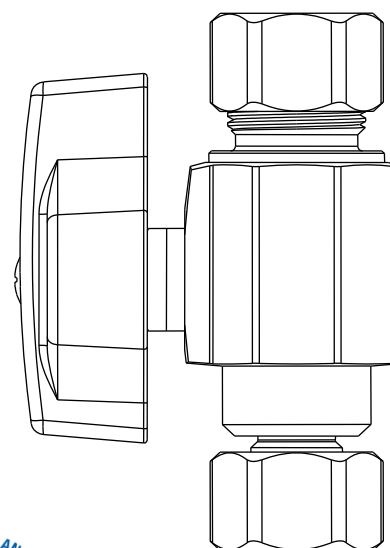

STOP MATERIAL SPECIFICATIONS

Body	Brass, plated
Stem	Brass, plated
Seat	PTFE
Ball	Brass, plated
Stem o-ring	Rubber
Handle	Zinc die cast, plated
Screw	Steel, zinc plated
Compression Sleeve	Brass
Compression Nut	Brass, plated
Barb	Brass
Washer	Rubber

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.45 KTCR11FX 1/4 Turn Straight Stop - Female Comp x Comp REV 9.19

BrassCraft®


©2019 Brasscraft Manufacturing Company

KTCR11FX 1/4 Turn Straight Stop – Female Compression x Compression

Part Listing:

- ☐ KTCR11FX C 3/8" OD female compression x 3/8" OD compression, chrome plated
- ☐ KTCR11FX C1 3/8" OD female compression x 3/8" OD compression, chrome plated, window box

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
KTCR11FX	1.14	2.36

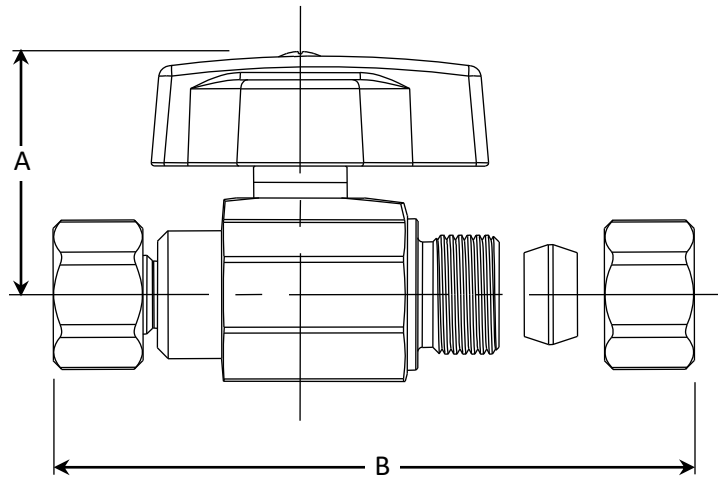

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.45 KTCR11FX 1/4 Turn Straight Stop - Female Comp x Comp REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company