

DIRTMAG® dirt separator with magnet, adjustable for vertical or horizontal pipe

© Copyright 2023 Caleffi

Function

In heating and chilled water systems, the circulation of water containing impurities may result in rapid wear and damage to components such as pumps and control valves. It also causes blockages in heat exchangers, heating elements and pipes, resulting in lower thermal efficiency within the system.

The dirt separator removes these dirt particles circulating within the closed circuit system. These particles are collected in a large chamber and are removed by opening the large drain valve while the system is running. This device is capable of efficiently removing particles to 5 microns, with very low pressure head loss.

The DIRTMAG® magnetic dirt separator removes both ferrous and non-ferrous impurities continuously, featuring a powerful removable external magnet around the body that removes up to 100% of the ferrous impurities, including magnetite, that can form in a hydronic system. The DIRTMAG has 2½ times the removal performance of a standard dirt separator. The body of the NA5453 series separator is made of glass reinforced nylon specifically designed for use in heating and cooling systems. It also is especially versatile as it can be installed on either horizontal or vertical piping with the rotating brass base mount.

The NA5453 series is available with conventional union NPT and union sweat connections and press copper tail-piece with union nut that makes installation and maintenance fast, easy and efficient. Also, models are available with isolation inlet and outlet shutoff valves, which can be used as a dosing point to inject chemical additives into the hydronic circuit.

These items are designed for use in closed hydronic systems. Do not use in plumbing applications. These items do not meet the low-lead plumbing standards of U.S. and Canada.

Product range

NA54530 series	DIRTMAG dirt separator with magnet for horizontal and vertical pipes, connections NPT threaded male union, sizes ¾" and 1".
NA54535 series	DIRTMAG dirt separator with magnet for horizontal and vertical pipes with isolation shut off valves, connections NPT threaded female, sizes ¾" and 1".
NA54539 series	DIRTMAG dirt separator with magnet for horizontal and vertical pipes, connections sweat union, sizes ¾" and 1".
NA54536 series	DIRTMAG dirt separator with magnet for horizontal and vertical pipes, connections press union, sizes ¾" and 1".
code NA54537	DIRTMAG dirt separator with magnet for horizontal and vertical pipes with isolation shut off valves, press connections, size 1".

SAFETY INSTRUCTION



This safety alert symbol will be used in this manual to draw attention to safety related instructions. When used, the safety alert symbol means.

ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED! FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN A SAFETY HAZARD.



CAUTION: All work must be performed by qualified personnel trained in the proper application, installation, and maintenance of systems in accordance with all applicable codes and ordinances.



CAUTION: If the DIRTMAG separator is not installed, commissioned and maintained properly, according to the instructions contained in this manual, it may not operate correctly and may endanger the user.



CAUTION: Make sure that all the connecting pipework is water tight.



CAUTION: When making the water connections, make sure that the pipework connecting the DIRTMAG is not mechanically over-stressed. Over time this could cause breakages, with consequent water losses which, in turn, could cause harm to property and/or people.



CAUTION: Water temperatures higher than 100°F (38°C) can be dangerous. During the installation, commissioning and maintenance of the DIRTMAG separator, take the necessary precautions to ensure that such temperatures do not endanger people.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warning.ca.gov.

Leave this manual for the user

CONSIGNE DE SÉCURITÉ



Ce symbole d'avertissement servira dans ce manuel à attirer l'attention sur la sécurité concernant instructions. Lorsqu'il est utilisé, ce symbole signifie.

ATTENTION! DEVEZ-VOUS ÊTRE ALERTES ! VOTRE SÉCURITÉ EST EN JEU ! NE PAS SUIVRE CES INSTRUCTIONS PEUT PROVOQUER UN RISQUE DE SÉCURITÉ.



ATTENTION: Tous les travaux doivent être effectués par du personnel qualifié formé à la bonne application, installation et maintenance des systèmes conformément aux codes et règlements locaux.



ATTENTION: Si le DIRTMAG n'est pas installé, mis en service et entretenu correctement, selon les instructions contenues dans ce manuel, il peut ne pas fonctionner correctement et peut mettre en danger l'utilisateur.



ATTENTION: S'assurer que tous les raccordements sont étanches.



ATTENTION: Lorsque vous effectuez les raccordements d'eau, assurez-vous que la tuyauterie reliant le DIRTMAG n'est pas mécaniquement overstressed. Au fil du temps, ceci pourrait causer des ruptures, avec pour conséquence des pertes en eau qui, à leur tour, peuvent causer des dommages à la propriété et/ou les gens.



ATTENTION: Les températures de l'eau supérieure à 100°F (38°C) peut être dangereux. Au cours de l'installation, mise en service et l'entretien de le réducteur de pression, le DIRTMAG, prendre les précautions nécessaires afin de s'assurer que de telles températures ne compromettent pas les gens.



AVERTISSEMENT: Ce produit peut vous exposer à des produits chimiques comme le plomb, qui est connu dans l'État de Californie pour causer le cancer, dommages à la naissance ou autre. Pour plus d'informations rendez-vous www.P65Warnings.ca.gov.

LAISSEZ CE MANUEL AVEC L'UTILISATEUR

Technical specifications

Materials

Body:	glass reinforced nylon PA66G30
Dirt separator cover:	glass reinforced nylon PA66G30
Top dosing point port plug:	brass EN 12164 CW614N
Drain screw:	brass EN 12164 CW614N
Tee pipe fitting:	brass EN 1982 CB 753S
Locking nut for tee pipe fitting:	brass EN 12420 CW617N
Internal element:	HDPE
Hydraulic seals:	peroxide-cured EPDM
Drain valve:	brass EN 12165 CW617N


Performance

Suitable Fluids:	water, glycol solutions
Max. percentage of glycol:	30%
Max. working pressure:	45 psi (3 bar)
Working temperature range:	32–195°F (0-90°C)
Magnets:	neodymium rare earth
Particle separation capacity:	to 5µm (0.2 mil)
Ferrous impurities separation efficiency:	up to 100% removal
Dosing capacity:	12 fluid oz

Connections

Main connections:	¾" and 1" NPT male union
	¾" and 1" NPT female
	¾" and 1" sweat union
	¾" and 1" press union
Lay length (press connection):	size ¾": 4 ½"
	size 1": 4 7/8"
Drain valve:	size 1" with isolation vales: 7 ¼"
	hose connection

Hydraulic characteristics





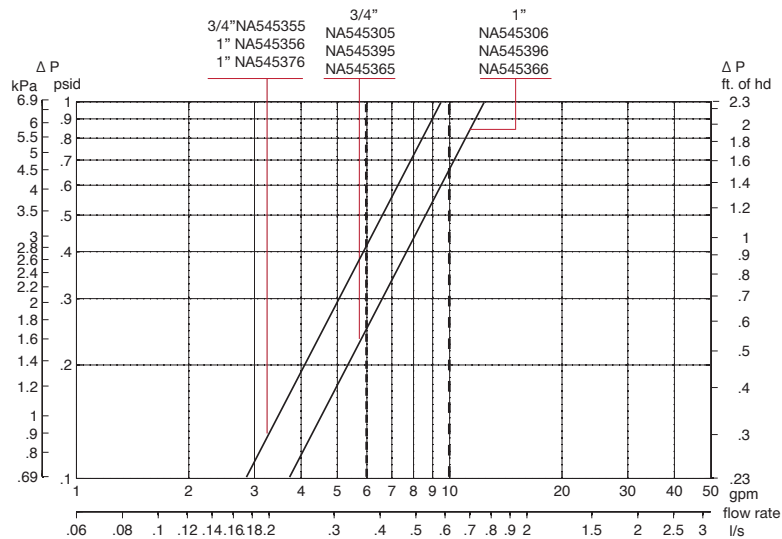


	MAX. FLOW RATE			
Size	3/4"	3/4" *	1"	1"*
GPM	6	6	10	10
Cv	12	9	12	9


*unit with isolation shutoff valves

Installation

The magnetic dirt separator should be installed in accordance with the flow direction indicated by the arrow on the tee fitting and the return circuit upstream of the boiler. The magnetic dirt separator should always be installed upstream of the pump and always with its body in vertical position.

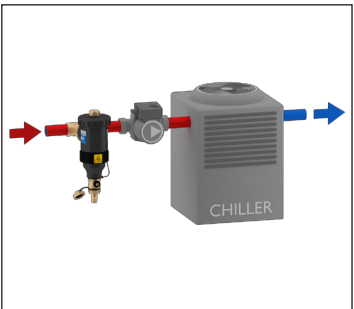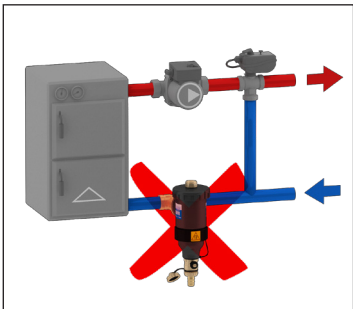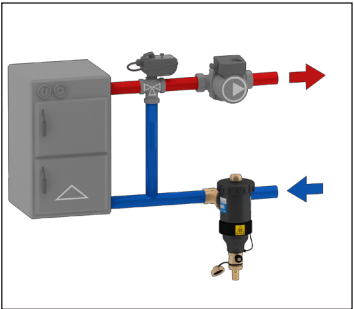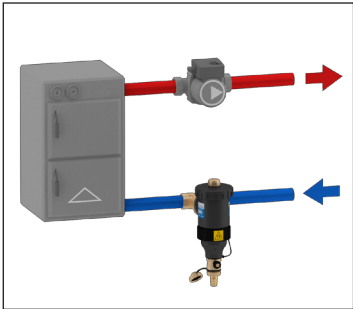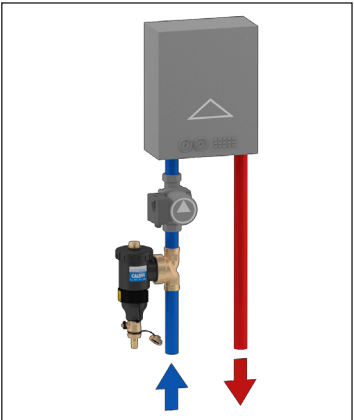


Dimensions

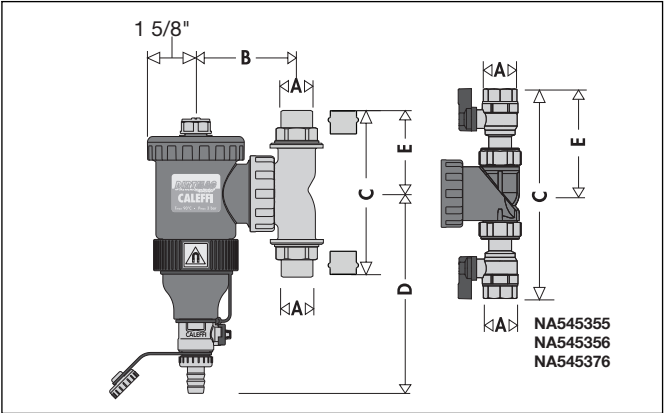

Code	A	B	C	D	E	WT (lb/kg)
NA545305	3/4" M NPT	3 7/16"	6 1/8"	7"	3"	4.5 /2.0
NA545395	3/4" sweat	3 7/16"	6 5/8"	7"	3 5/16"	4.5/2.0
NA545365	3/4" press	3 7/16"	6 1/2"	7"	3 1/8"	4.5/2.0
NA545306	1" M NPT	3 7/16"	6 3/4"	7"	3 1/2"	4.5/2.0
NA545396	1" sweat	3 7/16"	7 3/4"	7"	4"	4.5/2.0
NA545366	1" press	3 7/16"	6 3/4"	7"	3 1/2"	4.7/2.1
NA545355	3/4" F NPT	3 7/16"	8 1/2"	7"	4 1/4"	5.5/2.5
NA545356	1" F NPT	3 7/16"	8 3/4"	7"	4 3/8"	5.5/2.5
NA545376	1" press	3 7/16"	9 1/8"	7"	4 9/16"	5.5/2.5


Air vent

Eliminate air collected in the top of the body by loosening the top plug screw.




Maintenance

To perform maintenance after isolating the separator, simply unscrew the top cover using the provided key and remove the attached internal element inside the collection chamber.




Draining off dirt and ferrous impurities

Remove the magnetic ring (1) and drain the collected dirt and ferrous impurities. This can be done while the system is running, using the key provided (2).

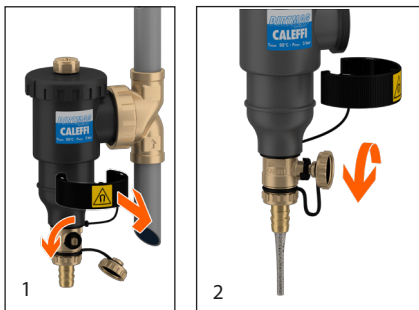


Dosing

This multifunction device can also be used as a dosing point to inject chemical additives into the circuit. Codes NA545355, NA545356 and NA535476 offer integral isolation check valves making for a more convenient dosing vessel, providing an easy access point for routine system water treatment in hydronic systems.

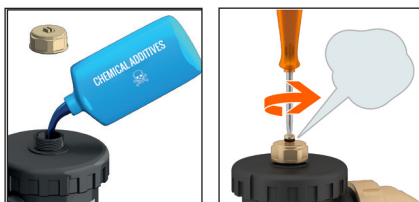

WARNING: The symbol  shown on the removable ring indicates the presence of magnets that generate a strong magnetic field. This could cause damages to electronic devices kept in its proximity.

1. Remove the magnetic ring containing the two magnets, that during operation attracted the magnetites.
2. Flush out the ferrous and nonferrous debris by turning the handle to open the drain valve.
3. When finished, replace the magnetic ring and close the drain valve.

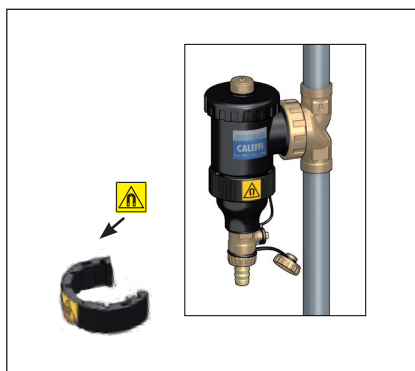

LEAVE THIS MANUAL WITH THE USER.

Laissez ce manuel à la disposition de l'utilisateur.

Scan to view .



Installation Tip

02-2023

 **CALEFFI**
Hydronic Solutions

Caleffi North America, Inc.
3883 W. Milwaukee Road
Milwaukee, WI 53208
T: 414.238.2360 F: 414.238.2366