


PRODUCT SPECIFICATIONS

Elkay Stainless Steel 60" x 20" x 8", Wall Hung Multiple Station Hand Wash Sink Kit. Sink is manufactured from 14 gauge 304 Stainless Steel with a Buffed Satin finish, Center drain placement.

Material:	304 Stainless Steel
Finish:	Buffed Satin
Gauge:	14
Number of Bowls:	1
Sink Dimensions:	60" x 20" x 25-3/4"
Bowl 1 Dimensions:	57" x 16-1/2" x 8"
Drain Size:	3-1/2" (89mm)
Drain Location:	Center



Hole Drilling Configurations:

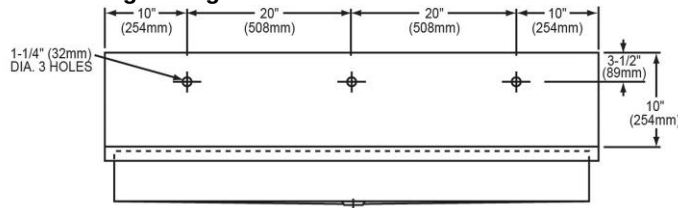

Included with Product: EWMA6020 sink,
three LKB722C sensor faucets AC
plug-in / 12 AA batteries,
one LK18B grid drain

▼ Ships in multiple boxes.

AMERICAN PRIDE. A LIFETIME TRADITION.
Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Product Compliance: ASME A112.19.3/CSA B45.4
Buy American Act
Faucet: ADA & ICC A117.1
ASME A112.18.1/CSA B125.1
NSF 372 (lead free)
NSF 61
Accessory: ASME A112.18.2/CSA B125.2



Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.





Faucet complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

[Clean and Care Manual \(PDF\)](#)
[Installation Instructions \(PDF\) - 1000005235_drain](#)
[Installation Instructions \(PDF\) - 98517C](#)
[Warranty \(PDF\)](#)

PART: _____ QTY: _____
PROJECT: _____
CONTACT: _____
DATE: _____
NOTES: _____
APPROVAL: _____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

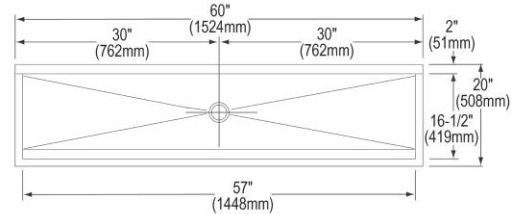

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

NOTE: ALL FASTENERS SUPPLIED BY OTHERS

1/4" (6mm) x 1" (25mm) 8 LONG SLOTS

OUTLINE OF SINK

7/16" (11mm) x 3/4" (19mm) 2 LONG SLOTS

Ø 7/16" (12mm) HOLES (2 PLACES)

1/2" (13mm) I.P.S. SUPPLY INLET (6 PLACES)

3-15/16" (100mm)

Ø 3/16" (5mm) HOLE (9 PLACES)

1-31/32" (50mm)

2-1/2" (64mm)

8-5/8" (219mm)

4" (102mm)

4" (102mm)

20" (610mm)

10" (254mm)

10" (254mm)

10" (254mm)

10" (254mm)

4" (102mm)

WALL HANGER

7/8" (22mm)

16-15/16" (430mm)

5-3/8" (137mm)

1-1/2" (38mm) I.P.S. WASTE

2" (51mm)

23" (584mm)

14-9/16" (370mm)




4" (102mm)

4" (102mm)

2-1/2" (64mm)

43-13/16" (1113mm) (PROVIDES 36" [914mm] FINISHED FLOOR TO RIM HEIGHT)

FINISHED FLOOR

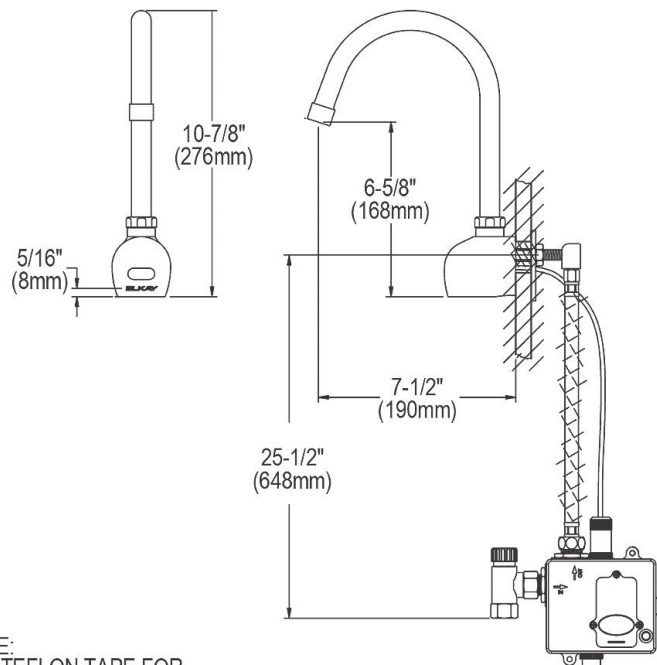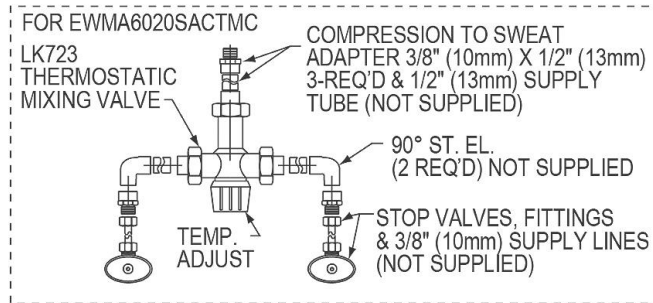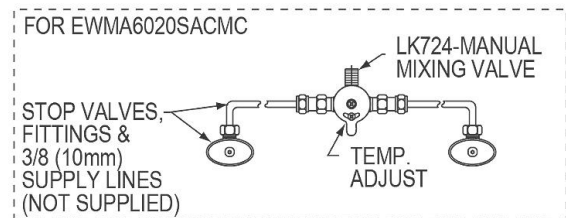

NOTE:
USE TEFLON TAPE FOR
ALL WATER CONNECTIONS.
DO NOT USE PIPE DOPE.