


Duct Supplies

Sheet Metal Adapters

FY



"Y" adapter for circular duct. Constructed of galvanized sheet metal.



Model	UPC#	A†	B†	C†	D	E
FY 4	64040	4	4	4	10½	12½
FY 5	64050	5	5	5	11	14
FY 6	64060	6	6	6	12½	13½
FY 86	64806	6	6	8	13	16
FY 8	64080	8	8	8	10	14
FY 810	64810	8	8	10	10½	16½

Dimensional information in inches.

† Duct connections are 1/8" smaller than duct size.

Roof Curbs


WI/CI



Prefabricated roof curbs reduce installation time by ensuring compatibility of the fan and curb. Curbs feature a welded 18 gauge galvanized steel construction, 3-inch cant, insulation and wooden nailing rail. Standard height is 8-inches.

Model	UPC#	A	FANS
WI 1508	42158	15	REC 6
CI 18Q08	42188	18½	REC 8XL REC 10XL

Dimensional information in inches.

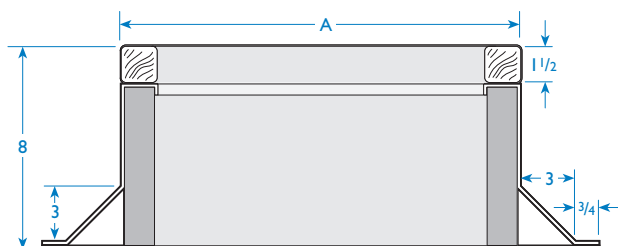


Dimensional information in inches.

CKR



Increaser or reducer for circular duct. Constructed of galvanized sheet metal.

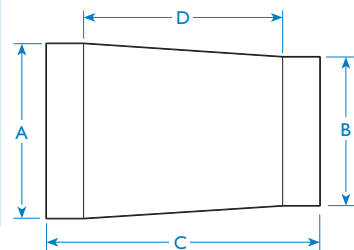

Model	UPC#	A†	B†	C	D
CKR 54	65054	5	4	7⅞	3¼
CKR 64	65064	6	4	8	4½
CKR 86	65086	8	6	7⅞	3¼

Dimensional information in inches.

† Duct connections are 1/8" smaller than duct size.

Silencers for Round Duct

LD



Galvanized steel silencer for use in kitchen range hood ventilation and other applications where noise is a concern.

A Fantech silencer can typically reduce the "perceived" sound level of the system by more than 50%. Units feature rubber seal on inlet and outlet.

Note: The recommended connector for the LD12 is the FC12-315 (see page 9).

Model	UPC#	ø Duct†	Outside ø	Length
LD 4	79040	4	8	23⅝
LD 5	79050	5	9	23⅝
LD 6	79060	6	10¼	23⅝
LD 8	79080	8	12½	23⅝
LD 10	79100	10	14	35½
LD 12	79120	12	17¾	35½
LD 16	79160	16	25	35½

Dimensional information in inches.

† Duct connections are 1/8" smaller than duct size.

Model	Sound Data (Suppression dB Frequency Bands Hz)						
	125	250	500	1000	2000	4000	8000
LD 4	8	14	26	34	41	45	25
LD 5	6	12	22	28	37	38	22
LD 6	5	10	18	23	33	30	19
LD 8	4	9	17	22	29	25	18
LD 10	6	11	21	27	39	25	19
LD 12	5	9	18	23	32	20	18
LD 16	5	8	11	23	19	17	15