



model **6800**
Support Frame

FEATURES & BENEFITS

MOUNTING

Painted steel support posts with mounting feet, and heavy duty cad plated U-bolts provide the maximum mounting strength for many Haws wall mounted drinking fountains.

OPTIONS

- ❑ Mounting Plate: Model 6700 universal mounting plate for most wall mounted fountains. Priced Separately.
- ❑ Mounting Plate: Model 6700.4 "Hi-Lo" universal mounting plate for most dual bubbler fountains. Priced Separately
- ❑ Mounting Plate: Model 6710 mounting plate.
- ❑ Mounting Plate: Model 6715 "Hi-Lo" mounting plate for Haws fountain model 1501.

For more information, visit www.hawesco.com or call (888) 640-4297.



SPECIFICATIONS


Model 6800: In-wall floor mounted fixture support legs: Two 2½" x 1½" x 3/32" thick structural steel uprights having 4½" x 2½" x 3/16" thick welded steel 4-bolt floor flanges, supplied with 'U' bolts and hardware. For use in conjunction with Haws in-wall mounting plates 6700, 6700.4, 6710, 6715 or 6717, for extra heavy duty fixture support in vandalism prone areas. Fits inside standard 2" x 4" wall construction.

APPLICATIONS

Haws produces this mounting frame to assist in the installation process as well as to provide a solid base for the wall mounted designed fountains. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.

NOTE:



- 1 THE 6800 SUPPORT CARRIER CAN ALSO BE USED WITH MOUNTING PLATE MODELS 6705, 6710, 6715 AND 6717.
- 2 ANCHORING SYSTEM - MINIMUM REQUIREMENTS: 1/2" UNC X 4" MIN. "L" ANCHORS (QTY 8) AND ASSOCIATED HARDWARE (NOT SUPPLIED). SEE MOUNTING BASE DETAIL A.
- 3 WHEN PLACED IN A 2 X 4 STUD WALL, U-BOLTS (SUPPLIED WITH ASSOCIATED HARDWARE) MUST BE TRIMMED AFTER BACK PANEL HEIGHT IS ADJUSTED.

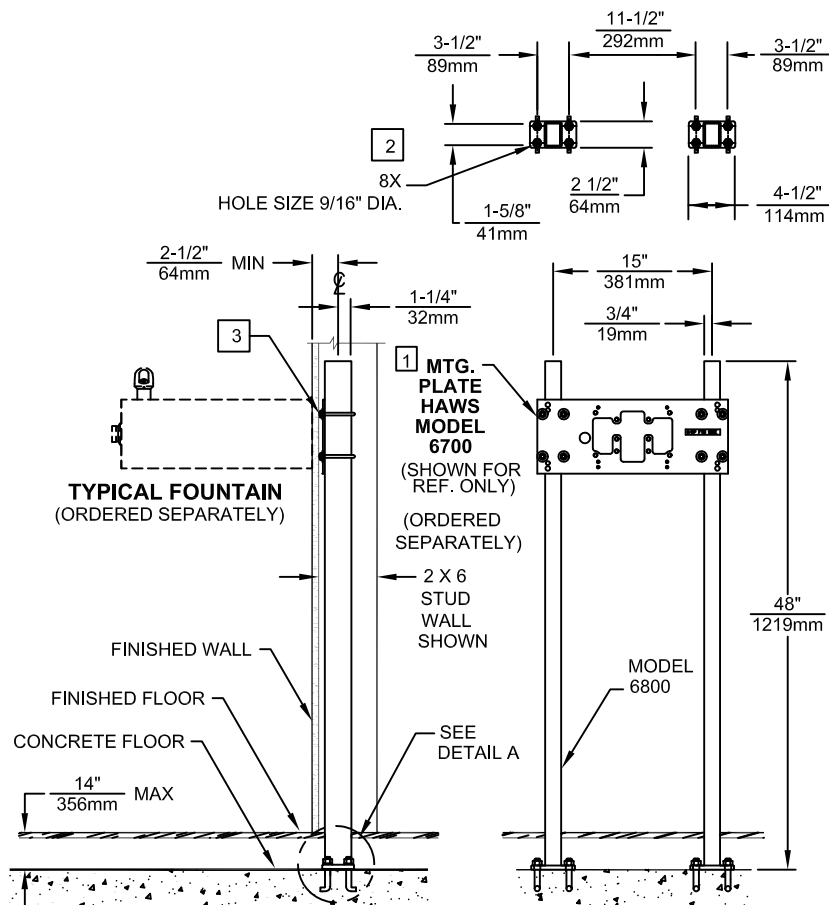

FOR MODELS: 1001, 1025 1047, 1075, 1105, 1107L, AND 1109

ATTENTION

THIS CHAIR CARRIER IS USED WITH SEVERAL DIFFERENT MODELS. FOR FOUNTAIN ROUGH-IN HEIGHTS AND MOUNTING PLATE ORIENTATION SEE THE MOST CURRENT INSTALLATION INSTRUCTIONS SUPPLIED WITH THE FOUNTAIN AND MOUNTING PLATE BEING USED PRIOR TO INSTALLING THIS UNIT.

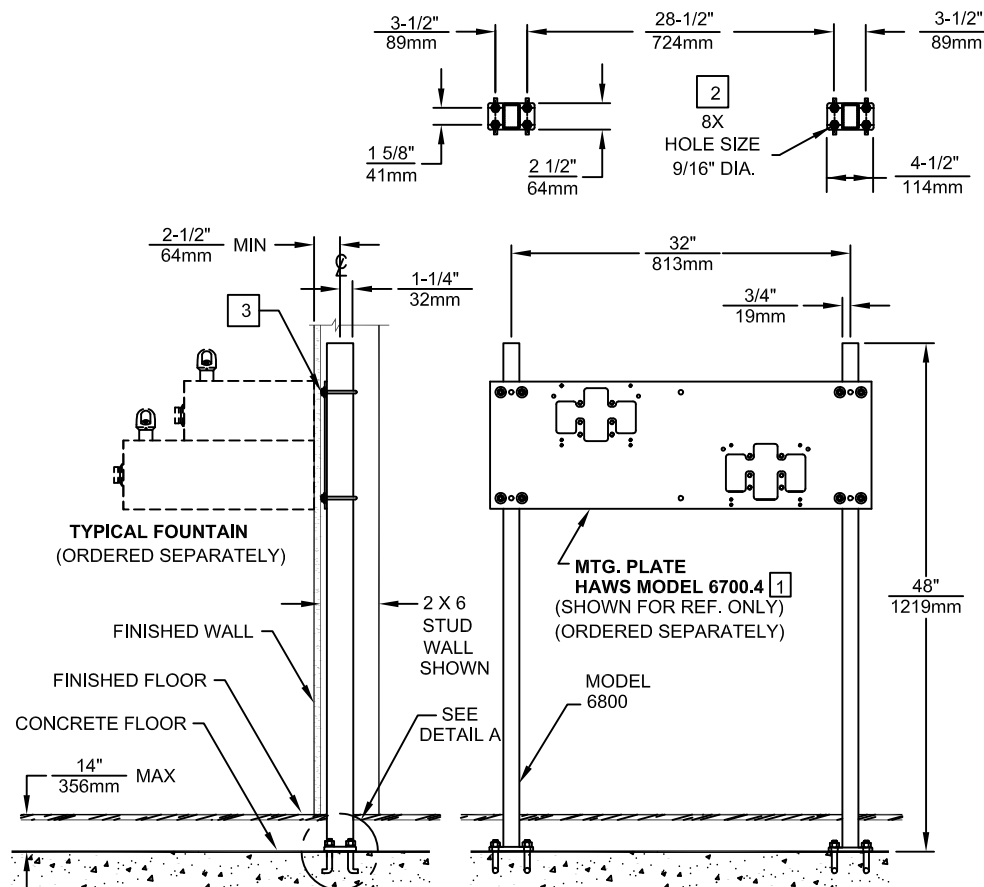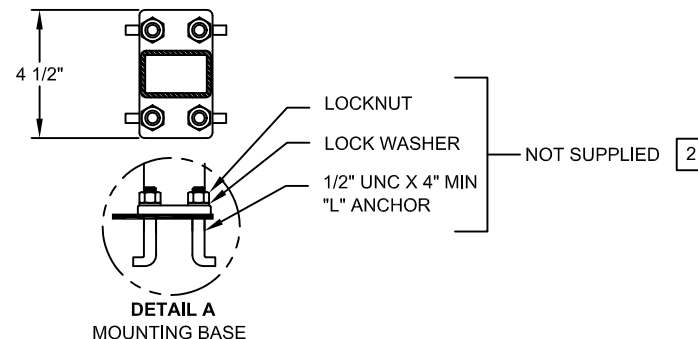

FOR MODELS: 1011, 1117L, 1119 AND 1119.14



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO. REVISED PER BY:	ECN: 4645	HM	MODEL(S)	PART NUMBER
DRAWN: C.J.L.	DATE: 10/93	CHKD:		0002080019
APPROVED:	DATE:		6800	DRAWING NO. REV
				10406C00 13
SCALE: 1:1		DRAWING TYPE:	INSTALLATION	SIZE: A SHEET 1 OF 1