

HYDRANTS

How To Order Wall Hydrants

Unless optional materials are specified, standard material shown in specification will be provided. Specify wall thickness.

EXAMPLE: Series No. 71000

Type No. 71000-6

Series No. _____ 71000 -6 -74
 Wall Thickness in Inches _____
 Option, Union Elbow Assembly _____

How To Order Yard Hydrants

Unless optional materials are specified, standard material shown in specification will be provided. Specify depth of bury.

EXAMPLE: Series No. 71600

Type No. 71600-91-4

Series No. _____ 71600 -91 -4 -97
 -91 1" Hose Pipe Threaded Outlet _____
 Depth Bury in Feet _____
 Option, 1/8" Tapped Drain Hole in Box _____

HYDRANTS • Pictorial Selection Guide

WALL HYDRANTS • Non-Freeze		WALL HYDRANTS • Mild Climate	
71000 with Vacuum Breaker & Box  Page 245	71050 with Vacuum Breaker  Page 246	71020 with Vacuum Breaker & Box  Page 245	71070 with Vacuum Breaker  Page 246
YARD HYDRANTS • Non-Freeze			TRI-TEMP
71400 Standard Duty  Page 247	71450 Heavy-Duty  Page 247	71600 Heavy-Duty  Page 247	71650 Non-Freeze  Page 248

71600 SERIES

YARD HYDRANT, BOX TYPE • NON-FREEZE

APPLICATION

For use where an outside potable water supply is required. The 1/8" NPT hole drains the body for frost protection and the recessed box with hinged latching cover conceals the nozzle and operating mechanism and prevents unauthorized use.

SPECIFICATION

JOSAM 71600 Series cast bronze non-freeze yard Hydrant with 3/4" H.P.T. outlet, satin finish face Nikaloy box, hinged latching cover, bronze casing, Neoprene plunger, removable bronze operating parts and straight inlet with standard hose connection.

Available Options


-52 Satin Finish Face, Bronze Box

-91 1" Hose Pipe Threaded Outlet

-95 Cylinder Vandal-Proof Lock

-97 1/8" Tapped Drain Hole in Box

TYPE NO.	SIZE	LBS.
71600-2	2' Bury	6
71600-3	3' Bury	8
71600-4	4' Bury	11
71600-5	5' Bury	13
71600-6	6' Bury	15

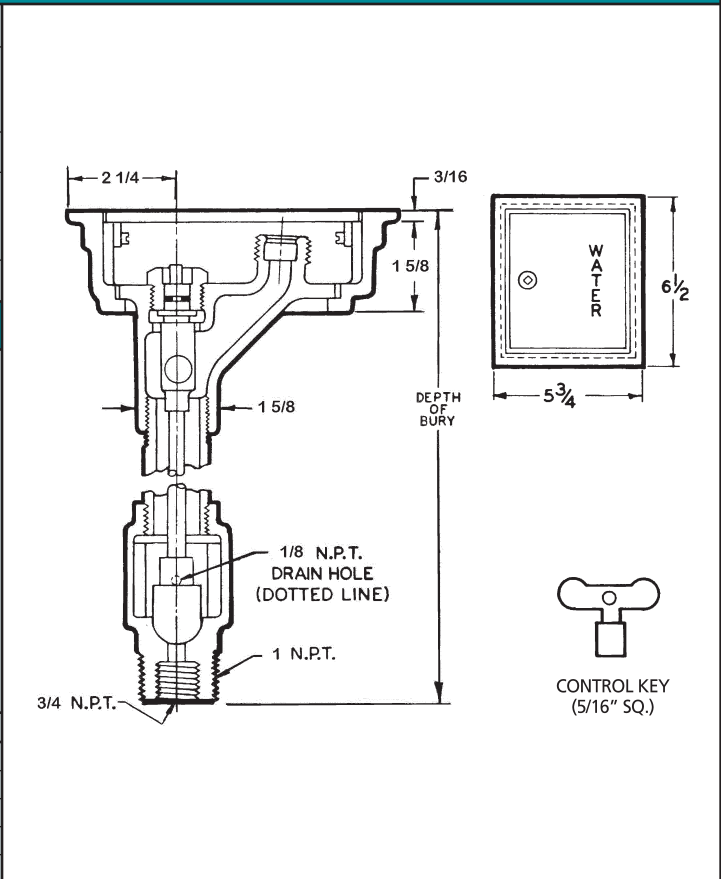

71650 SERIES

TRI-TEMP WALL HYDRANT, BOX TYPE • NON-FREEZE

APPLICATION

For use where a potable supply of cold, hot or mixed water is required such as dairies or wash down sites. The shut off design provides for frost protection and the recessed box with hinged latching cover conceals the nozzle and operating mechanism and prevents unauthorized use.

SPECIFICATION

JOSAM 71650 Series TRI-TEMP cast bronze non-freeze wall Hydrant with T-Handle, satin finish face Nikaloy box, hinged latching cover, bronze casings, Neoprene plungers, removable nylon seats, removable bronze operating parts, 3/4" female and 1" male N.P.T. inlet connections for hot and cold water and a mixing chamber with 3/4" H.P.T. outlet.

Available Options

-72 Wall Clamps

-73 Solder Inlet Adapters

-74 Union Elbow Assemblies

-81 Vacuum Breaker

-91 1" Hose Pipe Threaded Outlet

-95 Cylinder Vandal-Proof Lock

TYPE NO.	A	LBS.	TYPE NO.	A	LBS.
71650-6	6	24	71650-16	16	29
71650-8	8	25	71650-18	18	30
71650-10	10	26	71650-20	20	31
71650-12	12	27	71650-22	22	32
71650-14	14	28	71650-24	24	33

