

Features

- For baths 21" (533 mm) to 26" (660 mm) deep from the center of the bath overflow outlet to the center of the bath drain outlet.
- 45" (1143 mm) length external cable.
- Includes tee, drain ell, and overflow ell with attached 1-1/2" OD pipe.
- Flexible overflow joint conforms to various bath angles.
- For use with any PureFlo rotary or push hand controls and pop-up drain stopper kit (sold separately).
- No internal linkages to minimize the potential for clogging.

Material

- Metal construction.
- 17-gauge brass pipe.

Installation

- Above- or through-floor installation.
- Flexible overflow neck for easy installation to fit various bath angles.

Required Products/Accessories

- K-T37391 Rotary-turn bath drain trim
or
K-T37392 Rotary-turn bath drain trim
or
K-T37393 Rotary-turn bath drain trim
or
K-T37394 Rotary-turn bath drain trim
or
K-T37395 Bath drain trim
or
K-T37396 Push-button bath drain trim
or
K-T37397 Push-button bath drain trim

Recommended Products/Accessories

- K-23726 Drain treatment
K-23723 Faucet cleaner




Codes/Standards

ASME A112.18.2/CSA B125.2

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

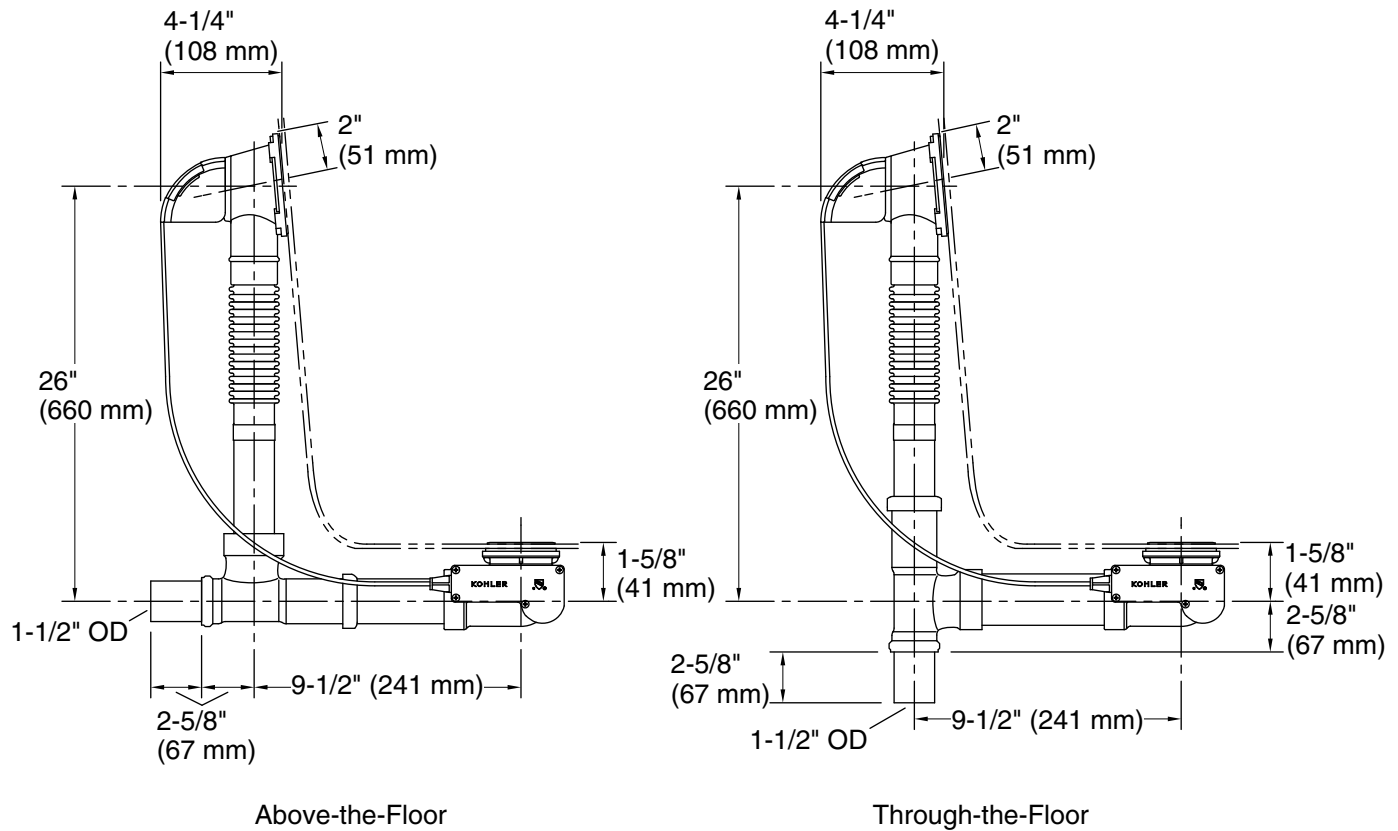

Technical Information

All product dimensions are nominal.

Notes

Install this product according to the installation guide.

The combined length of the vertical tubing (supplied) and horizontal tubing (not supplied) after being cut for the bath installation must be equal to or less than 40" (1016 mm) for 45" (1143 mm) cable bath drain.