



# Revel®

## Frameless Sliding Bath Door

### K-707000-L

#### Features

- Center-guided mechanism for smooth, quiet sliding action and easy cleaning
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability

#### Material

- Frameless, 1/4" (6 mm) thick Crystal Clear tempered glass

#### Technology

- Frameless design with minimal metal allows for greater ease of cleaning
- Low bottom track creates easy entry and exit to the bathing space

#### Installation

- Out-of-plumb adjustability simplifies installation
- Sliding bath door
- Not for use in hospitality



#### Codes/Standards

ANSI Z97.1  
CAN/CGSB-12.1  
CPSC 16CFR 1201

#### KOHLER® Bath and Shower Doors Ten-Year Limited Warranty

See website for detailed warranty information.




#### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color                                                                               | Code | Description             |
|-------------------------------------------------------------------------------------|------|-------------------------|
|  | SHP  | Bright Polished Silver  |
|  | ABZ  | Anodized Dark Bronze    |
|  | BNK  | Anodized Brushed Nickel |

#### Available Glass Options

| Code | Description   |
|------|---------------|
| L    | Crystal Clear |

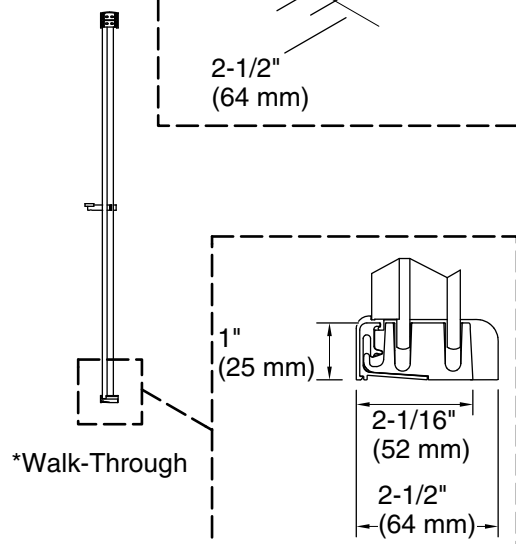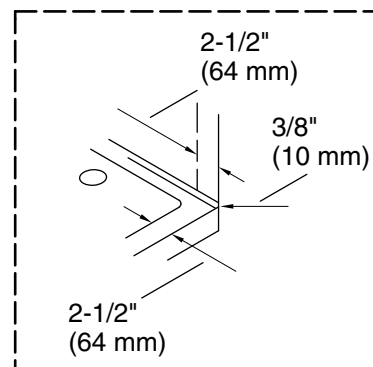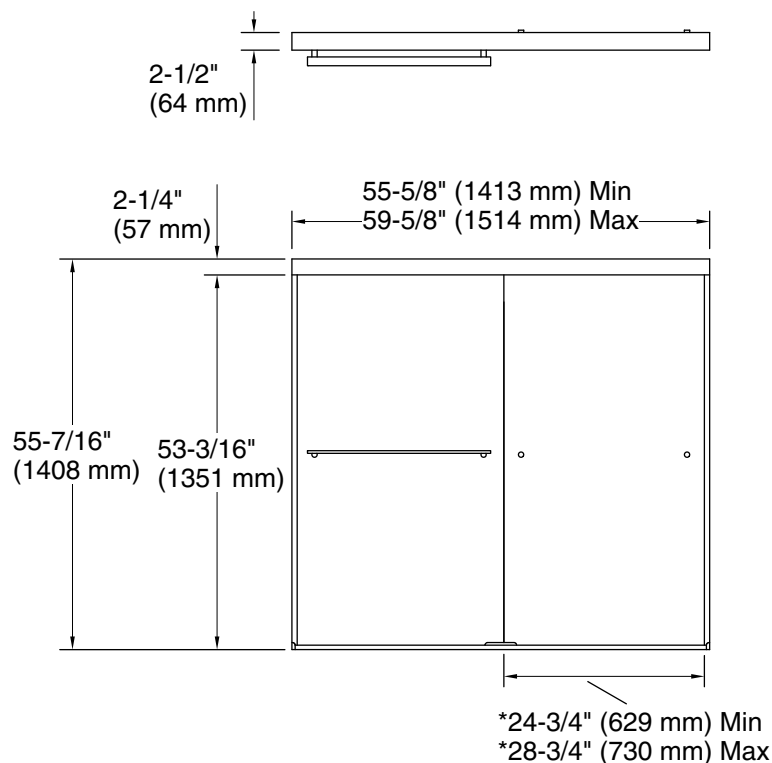

## Technical Information

All product dimensions are nominal.

|                  |                |
|------------------|----------------|
| Base-To-Wall     | 3/8" (10 mm)   |
| Radius – Max:    |                |
| Shower Ledge Min | 2-1/2" (64 mm) |
| Flat:            |                |
| Shower Wall Min  | 2-1/2" (64 mm) |
| Flat:            |                |

## Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

**NOTICE:** The vertical opening should be a minimum of 58" (1473 mm) to allow clearance for installing the top track over the wall jambs.

The vertical opening should be a minimum of 58" (1473 mm) to allow for installation clearance.