



McGuire Manufacturing Co., Inc.

60 Grandview Court
Cheshire, Connecticut 06410
(203) 699-1801 Fax (203) 699-1813
customerservice@mcguiremfg.com mcguiremfg.com

PRODUCT SPECIFICATION


Part No.

PW2150WC

**Seamless Prewrapped Cast P-Trap
Insulation Kit with Prewrapped
Offset Grid Strainer**



Job Name:

Submittal Number:

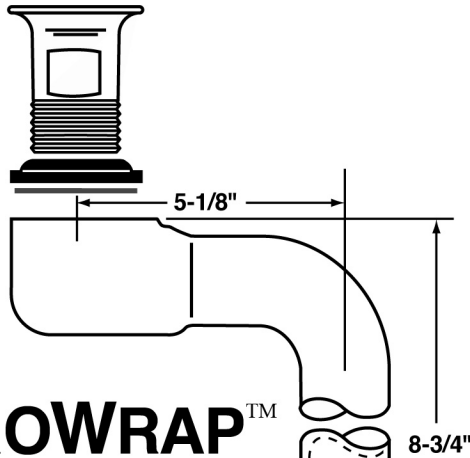

PROWRAP™

**Supply Covers (1 pair)
Included With All P-Trap Kits**

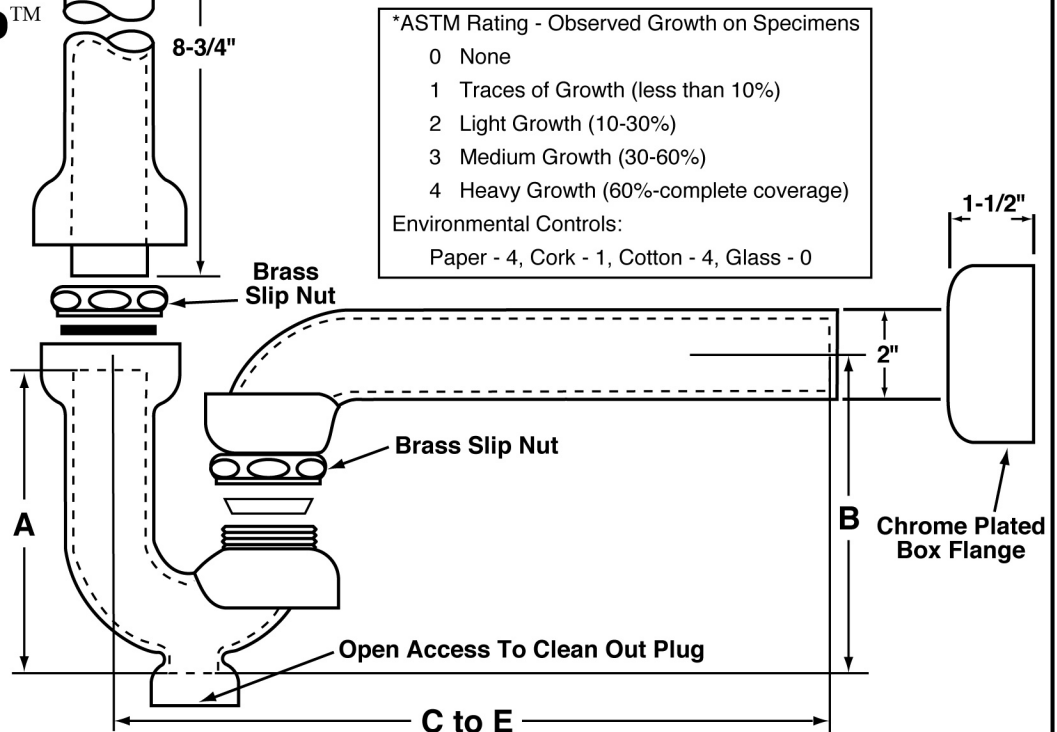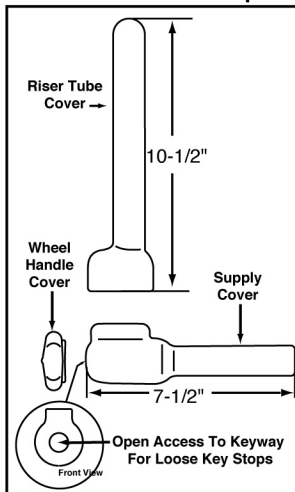

Insulation Material Specifications

MATERIAL... Molded closed cell vinyl (ANTI-MICROBIAL)

DUROMETER... 70 shore A

COLOR... Glossy White

BURNING CHARACTERISTICS...

ASTM D 635: Less than 5 sec (ATB) 10mm (AEB)

HEAT RESISTANCE...

ASTM C 177: BTU - in/hr - ft 2 - °F KValue = 1.02

FUNGAL RESISTANCE...

ASTM G - 21: (Rating*) 0 fungal growth measured

ASTM G - 22: (Rating*) 0 bacterial growth measured

*ASTM Rating - Observed Growth on Specimens

- 0 None
- 1 Traces of Growth (less than 10%)
- 2 Light Growth (10-30%)
- 3 Medium Growth (30-60%)
- 4 Heavy Growth (60%-complete coverage)

Environmental Controls:

Paper - 4, Cork - 1, Cotton - 4, Glass - 0

ROUGHING MEASUREMENTS

NO.	P-TRAP DIMENSIONS	A	B
PW2150WC	1-1/2" - 17 G.A. - 12" C to E	5"	4-1/2"

- Rated Operating Temperature: 40-140°F
- Note: 180°F max. during temporary high-temperature system flush

A.D.A.



See options and accessories section for details on product variations.

ASME A112.18.2/CSA B125.2

Specifications:

Seamless PreWrapped Adjustable Cast Brass P-Trap Kit with PreWrapped offset grid drain. Furnished with McGuire cast brass adjustable P-Trap with cleanout, offset grid drain assembly, seamless riser tube covers, supply angle stop covers, angle stop wheel handle covers, and chrome plated box flange.



WARNING:

This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.