

Location: \_\_\_\_\_




**Lil**  
(MI-G-PL)

**Lil Max® – 7 to 50 GPM HDPE  
Grease Interceptors**

**Specification:** MIFAB® Series Lil-(specify size) HDPE injection molded hydromechanical grease interceptor with flow rating of \_\_\_\_ (indicate) and grease holding capacity of \_\_\_\_ (indicate). Unit shall include: removable baffle assembly, deep seal trap covered by lid, sewer gas stopper, securing latches, external vented flow control fitting, internal air relief by pass, HDPE injection molded, non skid, rectangular gasketed lid(s). Interceptor shall be tested and certified to the P.D.I. Standard PDI-G101, CSA B481, A.S.M.E. A112.14.3 and listed with I.A.P.M.O. Lil Max grease interceptors are also in compliance with International Plumbing Code (I.P.C.) / I.C.C. by I.A.P.M.O.

**Function:** Used in restaurants, kitchens, institutions and other types of food processing areas where fat, oil and grease (FOG) drains with the waste water. External flow control fitting must be installed according to manufacturer's instructions to control rate of flow into the interceptor and therefore, the operating efficiency. Interceptor may be installed on the ground, semi recessed or flush with the floor. Simple latch lid design permits fast and easy removal of the lid for cleaning and maintenance. HDPE injection molded body and lid is covered by a limited lifetime warranty. Sewer gas stopper prevents foul odors from entering the kitchen area through the interceptor. All Lil Max interceptors can withstand a temperature of up to and including 180 degrees Fahrenheit.

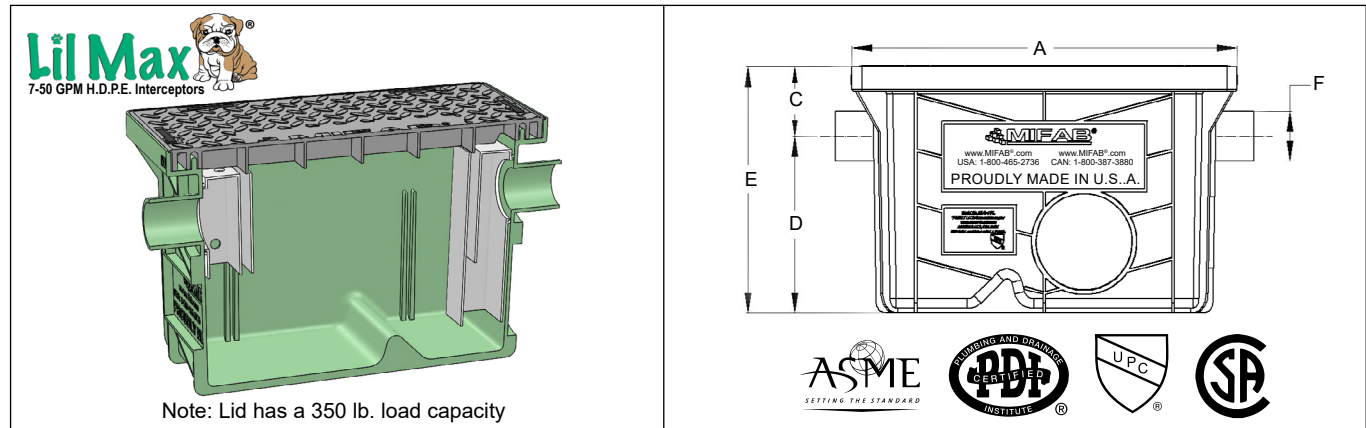

| MODEL NO.                                  | FLOW RATE (GPM) | GREASE CAP. (LBS.) per PDI | LIQUID CAP. (Gallons) | GREASE DESIGN CAPACITY (Lbs.) | A (IN) | B (IN) WIDTH | C (IN) | D (IN) | E (IN) | F (IN) | Shipping Weight (lbs.) (in box) | Box Dimensions (L x W x H) |
|--------------------------------------------|-----------------|----------------------------|-----------------------|-------------------------------|--------|--------------|--------|--------|--------|--------|---------------------------------|----------------------------|
| <input checked="" type="radio"/> Lil-7     | 7               | 14                         | 5.8                   | 43                            | 19.5   | 15.5         | 3.5    | 9      | 12.5   | 2      | 16                              | 22" x 16" x 13"            |
| <input checked="" type="radio"/> Lil-10    | 10              | 20                         | 8.5                   | 48                            | 23     | 17.5         | 3.5    | 9.75   | 13.25  | 2      | 25                              | 25" x 18" x 14"            |
| <input checked="" type="radio"/> Lil-15    | 15              | 30                         | 13                    | 57                            | 23     | 17.5         | 3.5    | 13.25  | 16.75  | 2      | 28                              | 25" x 18" x 17.5"          |
| <input checked="" type="radio"/> Lil-20    | 20              | 40                         | 16                    | 84                            | 29.5   | 20.5         | 3.5    | 10.75  | 14.25  | 3      | 36                              | 32" x 21" x 15"            |
| <input checked="" type="radio"/> Lil-25    | 25              | 50                         | 23                    | 91                            | 29.5   | 20.5         | 3.5    | 14.75  | 18.25  | 3      | 39                              | 32" x 21" x 19"            |
| <input checked="" type="radio"/> Lil-35    | 35              | 70                         | 39                    | 130                           | 33     | 25.5         | 5.5    | 16.75  | 22.25  | 3      | 52                              | 35" x 26" x 23"            |
| <input checked="" type="radio"/> Lil-50    | 50              | 100                        | 44                    | 140                           | 33     | 25.5         | 5.5    | 18.75  | 24.25  | 3      | 66                              | 35" x 26" x 25"            |
| <input checked="" type="radio"/> Lil-25-LP | 25              | 50                         | 19                    | 85                            | 33     | 25.5         | 3.5    | 7 1/2" | 11"    | 3      | 43                              | 35" x 26" x 13"            |

| Suffix                          | Description                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> -C     | Extension "C" as required (up to 9" increments) (for models Lil-20 and Lil-25) (contact MIFAB® for other model extensions) |
| <input type="checkbox"/> -C     | Extension "C" as required (up to 9" increments) (for models Lil-35, Lil-50 and Lil-25-LP)                                  |
| <input type="checkbox"/> -DP    | Dosing Pump                                                                                                                |
| <input type="checkbox"/> -EP    | Enzyme port                                                                                                                |
| <input type="checkbox"/> -F     | Connection sizes different from standard (specify size) (by using a MIFAB MI-HUB increasing / reducing coupling).          |
| <input type="checkbox"/> -HD    | Heavy duty 10 gauge steel lid (up to 2,000 lbs.) - see MI-CS cover shrouds from the MPB price book                         |
| <input type="checkbox"/> -HLA   | High level alarm and float switch (to be installed on site)                                                                |
| <input type="checkbox"/> -LHSI  | No hub inlet on left hand side (not available with sediment bucket)                                                        |
| <input type="checkbox"/> -OP    | Internal flow control (does not meet PDI Standards)                                                                        |
| <input type="checkbox"/> -POK   | Remote pump out kit                                                                                                        |
| <input type="checkbox"/> -RHSI  | No hub inlet on right hand side (not available with sediment bucket)                                                       |
| <input type="checkbox"/> -RPO   | 4" Remote pump outlet connections on top of interceptor - specify location and number required                             |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-7                                                                                                  |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-10                                                                                                 |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-15                                                                                                 |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-20                                                                                                 |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-25                                                                                                 |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-35                                                                                                 |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-50                                                                                                 |
| <input type="checkbox"/> -SB    | Sediment bucket for Lil-25-LP                                                                                              |
| <input type="checkbox"/> -SP-IN | External Sampling Port - inline (part # Lil-SP)                                                                            |
| <input type="checkbox"/> -SP-OF | External Sampling Port - offset (part # Lil-SP-OF)                                                                         |
| <input type="checkbox"/> -T     | Female threaded connections                                                                                                |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_