

Location: \_\_\_\_\_





**MI-GO**

**ECONOMY GREASE INTERCEPTOR**

**Specification:** MIFAB Series MI-GO \_\_\_\_ (specify model) sanitary powder epoxy coated inside and outside fabricated 14 gauge steel grease interceptor with flow rating of \_\_\_\_ (indicate) and grease holding capacity of \_\_\_\_ (indicate). Unit shall include: removable separator screen, cross bars, securing bolts and steel powder epoxy coated, gasketed lid.

**Function:** Used in restaurants, kitchens, and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. Interceptor must be installed on the ground.

## MI-GO-1 Style

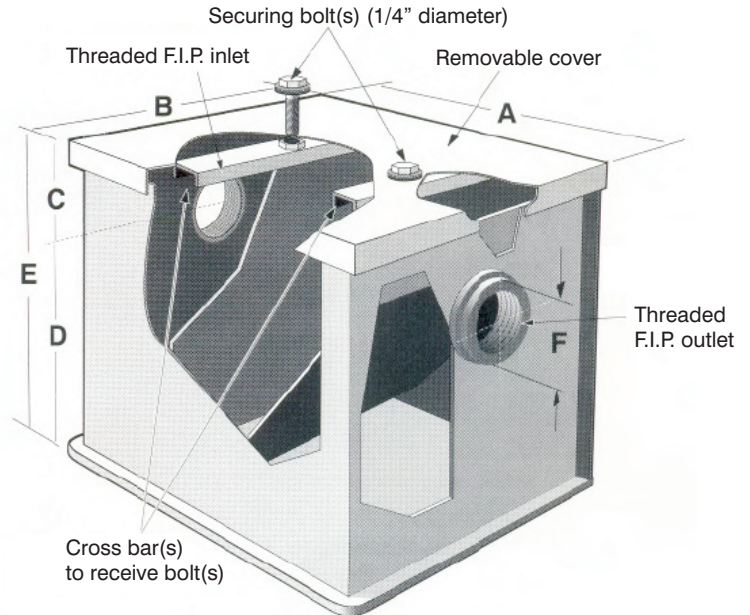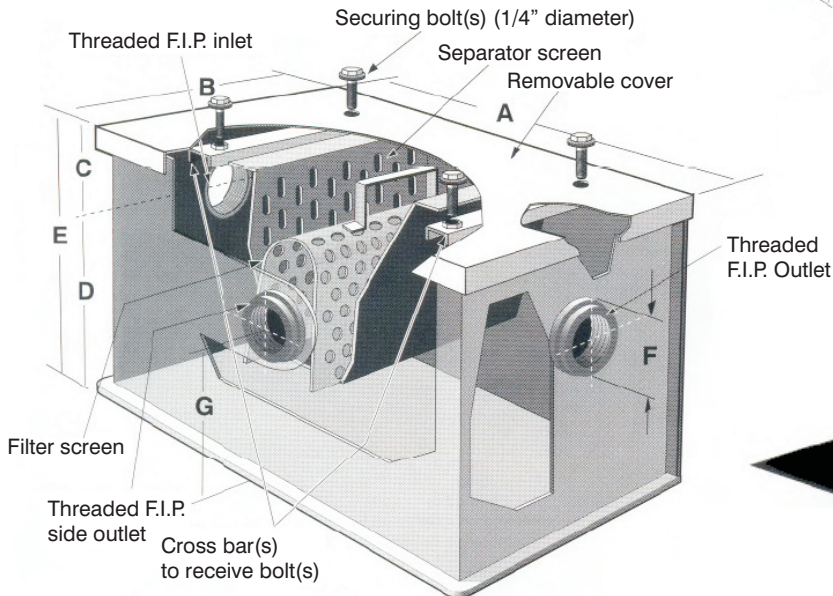

## MI-GO-2, MI-GO-3 and MI-G-4 style

The separator screen is perforated at one end only. This end should always face the inlet. The separator screen can be reversed to change the inlet location. The MI-GO-2 style has a male threaded side outlet. The MI-GO-3 and MI-GO-4 style has a female threaded side outlet. THE MI-GO-3 and MI-GO-4 style have 4 bolts securing the lid to the body. The MI-GO-2 style has 2 bolts securing the lid to the body.

| MODEL NO. | US GPM | GREASE CAP. LBS. | BODY DIMENSIONS |        |         |          |    |       | OVERALL DIMENSIONS |        |         |          |        | Replaces HICO | Replaces ROCK-FORD | Shipping Weight LBS. |
|-----------|--------|------------------|-----------------|--------|---------|----------|----|-------|--------------------|--------|---------|----------|--------|---------------|--------------------|----------------------|
|           |        |                  | LGTH            | WIDTH  | D Inlet | D Outlet | F  | G     | A                  | B      | C Inlet | C Outlet | E      |               |                    |                      |
|           |        |                  |                 |        | IN      | IN       | IN | IN    | IN                 | IN     | IN      | IN       | IN     |               |                    |                      |
| MI-GO-1 ○ | 8      | 12               | 10              | 8      | 6 1/2   | 6 1/2    | 2  | N/A   | 10 3/4             | 8 3/4  | 3 3/4   | 3 3/4    | 10 1/4 | 3620          | -                  | 16                   |
| MI-GO-2 ○ | 8      | 12               | 10              | 8      | 6       | 6        | 2  | 3 1/4 | 10 3/4             | 8 3/4  | 4 1/4   | 4 1/4    | 10 1/4 | 3630          | G-1012             | 22                   |
| MI-GO-3 ○ | 16     | 60               | 18 3/8          | 10 1/4 | 11      | 11       | 2  | 7 3/4 | 18 7/8             | 10 3/4 | 4 1/2   | 4 1/2    | 15 1/2 | 3631          | G-1815             | 50                   |
| MI-GO-4 ○ | 20     | 70               | 20 1/4          | 12     | 12      | 12       | 2  | 9     | 20 3/4             | 10 3/4 | 6       | 6        | 18     | 3632          | G-1820             | 70                   |

Body Dimensions are with the lid off

Overall Dimensions are with the lid on

### SUFFIX

□ -SS

### OPTIONAL VARIATION

Type 304 Fabricated Stainless Steel Interceptor

Job Name: \_\_\_\_\_  
 Section No: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_

Page No: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Purchase Order No: \_\_\_\_\_

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880