

Location: \_\_\_\_\_




**F1100-SHG**

**FLOOR DRAIN WITH SQUARE HINGED STRAINER FOR NON-MEMBRANE FLOOR AREAS**

**Specification:** MIFAB® Series F1100-SHG(\*)-3 (\* specify strainer size) lacquered cast iron floor drain with anchor flange, weepholes, and square, hinged, heavy duty, polished stainless steel strainer. (For membrane floors, use MIFAB F1100-C-SHG Series.)

**Function:** Used in showers, kitchens, restrooms and other non-membrane finished areas. Hinged grate ensures that grate is not lost during maintenance. Square adjustable stainless steel hinged strainer is used for all types of poured finished floors.

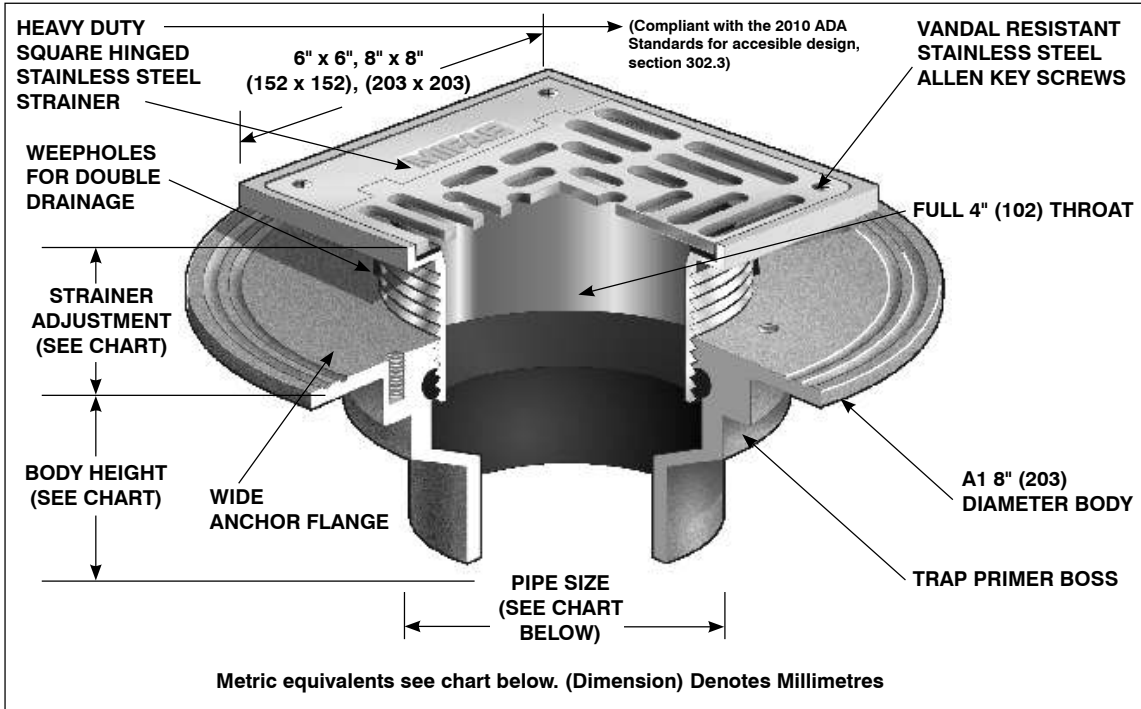

**PARTS:**



A1 BODY



SHG(\*)-3  
(\*) Denotes Strainer Size (6"x6" or 8"x8")

F1100-SHG Series meets  
ANSI-ASME floor  
drain standard  
A112.6.3-2001

| STRAINER SIZE          | STRAINER ADJUSTMENT |             | ANSI/ASME RATING                            |                       | PIPE SIZE                        | BODY HEIGHT                       |                                   |                                  |                                  |                              |
|------------------------|---------------------|-------------|---------------------------------------------|-----------------------|----------------------------------|-----------------------------------|-----------------------------------|----------------------------------|----------------------------------|------------------------------|
|                        | MIN                 | MAX         | FREE AREA                                   | LOAD RATING S.S. (-3) |                                  | NO HUB (STANDARD)                 | PUSH ON (P)                       | THREADED (T)                     | INSIDE CAULK (X)                 | PVC/ABS (-30)/(-31)          |
| 6" x 6"<br>(152 x 152) | 11/16" (17)         | 1 1/2" (38) | 9 in <sup>2</sup><br>(7700 <sup>2</sup> )   | 5000 to 7499 LBS.     | 2" (51)<br>3" (76)               | 3" (76)<br>3" (76)                | 3 3/8" (86)<br>3 3/8" (86)        | 2 1/4" (57)<br>2 5/8" (67)       | 3 3/4" (95)<br>3 3/4" (95)       | 2 15/16" (75)<br>3 3/4" (95) |
| 8" x 8"<br>(203 x 203) | 11/16" (17)         | 2 1/4" (57) | 18 in <sup>2</sup><br>(11600 <sup>2</sup> ) | 5000 to 7499 LBS.     | 4" (102)<br>5" (127)<br>6" (152) | 3" (76)<br>3" (76)<br>3 1/4" (83) | 3 3/8" (86)<br>--<br>6 1/2" (165) | 2 5/8" (67)<br>2 5/8" (67)<br>-- | 3 3/4" (95)<br>3 3/4" (95)<br>-- | 3 3/4" (95)<br>--<br>--      |

**SUFFIX**

**OPTIONAL VARIATIONS**

-3 Stainless steel strainer (standard)  
-5 Sediment bucket  
-6 Security screws (T-20 Torx & pin)  
-7 1/2" trap seal primer connection  
-8 Backwater valve (2", 3", 4")  
-11 Acid resistant epoxy coated body  
-13 Galvanized body  
-15 Extension  
-21 Secondary flat stainless steel strainer (2", 3", 4")  
-28 Stainless steel body (Type 304)  
-30 PVC socket connection body  
-31 ABS socket connection body  
-34 Closure plug  
-40 Underdeck clamp  
-41 Sump receiver  
-49 Chrome Plated Strainer  
-90 Threaded side outlet (2", 3", 4") (cast iron only)

**SUFFIX**

**OPTIONAL VARIATIONS**

-90NH No hub side outlet (2", 3", 4") (cast iron only)  
-95 Client logo  
-BA Buy American Act compliant product  
-C Membrane clamp for low rough-in (min. 1/2" (13))  
-C2 High rough-in membrane clamp (min. 1 9/16" (40))  
-F4 4" Round funnel  
-F6 6" Round funnel  
-G Oval 4" x 9" funnel  
-J 6" x 3" x 1" funnel  
(Standard) No hub outlet  
-MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")  
P Push on outlet  
-PA Pennsylvania Steel Act compliant product  
T Threaded outlet (2", 3", 4")  
X Inside caulk outlet  
-Z Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_