

Location: \_\_\_\_\_




**F1340-TFB**

**FLOOR DRAIN WITH 12" ROUND ADJUSTABLE TRACTOR GRATE AND "TRUE-FIT" SEDIMENT BUCKET**

**Specification:** MIFAB® Series F1340-TFB-4 lacquered cast iron deep sump floor drain with anchor flange, weepholes, and adjustable collar with standard 1" (25) thick, 12" (305) round, (specify material finish) tractor grate and "True-Fit" sediment bucket designed so that grate cannot be set unless the sediment bucket is in position.

**Function:** Used where waste water contains solids or debris that must be intercepted to prevent drain line clogging. "True-Fit" design ensures that the sediment bucket will always be replaced after cleaning. The grate cannot be set unless the sediment bucket is in place.

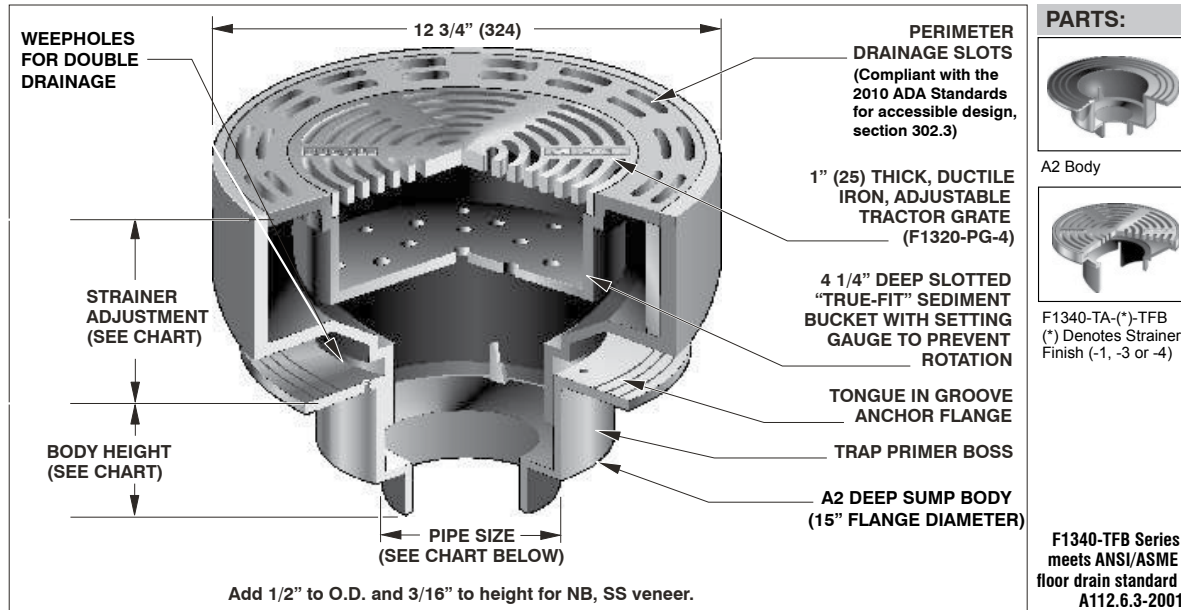

| STRAINER DIAMETER | STRAINER ADJUSTMENT |              | ANSI/ASME RATING                          |                                                        | PIPE SIZE                                                                      | BODY HEIGHT                                                                                                                                                                                                                        |                                                                                                                                                                                                                          |                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                         |                                                                                                                                                                                                                   |
|-------------------|---------------------|--------------|-------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | MIN                 | MAX          | FREE AREA                                 | LOAD RATING                                            |                                                                                | NO HUB (STANDARD)                                                                                                                                                                                                                  | PUSH ON (P)                                                                                                                                                                                                              | THREADED (T)                                                                                                                                                                                                                            | INSIDE CAULK (X)                                                                                                                                                                                                                        | PVC/ABS (-30)/(-31)                                                                                                                                                                                               |
| 12" 3/4" (324)    | 2 1/4" (57)         | 4 1/8" (105) | 33 in <sup>2</sup> (21,290 <sup>2</sup> ) | ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.) | 2" (51) ○<br>3" (76) ○<br>4" (102) ○<br>5" (127) ○<br>6" (152) ○<br>8" (204) ○ | 6" (152) <input type="checkbox"/><br>6" (152) <input type="checkbox"/><br>6" (152) <input type="checkbox"/><br>6" (152) <input type="checkbox"/><br>7 1/4" (184) <input type="checkbox"/><br>5 7/8" (150) <input type="checkbox"/> | 6 1/8" (156) <input type="checkbox"/><br>6 1/8" (156) <input type="checkbox"/><br>6 1/8" (156) <input type="checkbox"/><br>— <input type="checkbox"/><br>7" (178) <input type="checkbox"/><br>— <input type="checkbox"/> | 5 7/16" (138) <input type="checkbox"/><br>5 7/16" (138) <input type="checkbox"/><br>5 7/16" (138) <input type="checkbox"/><br>5 7/16" (138) <input type="checkbox"/><br>7" (178) <input type="checkbox"/><br>— <input type="checkbox"/> | 6 1/4" (159) <input type="checkbox"/><br>6 1/4" (159) <input type="checkbox"/><br>6 1/4" (159) <input type="checkbox"/><br>6 1/4" (159) <input type="checkbox"/><br>6 1/4" (159) <input type="checkbox"/><br>— <input type="checkbox"/> | 7 1/8" (181) <input type="checkbox"/><br>7 3/8" (187) <input type="checkbox"/><br>7 3/8" (187) <input type="checkbox"/><br>— <input type="checkbox"/><br>— <input type="checkbox"/><br>— <input type="checkbox"/> |

| SUFFIX                       | OPTIONAL VARIATIONS                                  |
|------------------------------|------------------------------------------------------|
| <input type="checkbox"/> -1  | Nickel bronze strainer (veneer)                      |
| <input type="checkbox"/> -3  | Stainless steel strainer (veneer)                    |
| <input type="checkbox"/> -4  | Ductile iron strainer                                |
| <input type="checkbox"/> -6  | Security screws (T-20 Torx & pin)                    |
| <input type="checkbox"/> -7  | 1/2" trap seal primer connection                     |
| <input type="checkbox"/> -8  | Backwater valve (2", 3", 4")                         |
| <input type="checkbox"/> -11 | Acid resistant epoxy coated body                     |
| <input type="checkbox"/> -12 | Galvanized top assembly                              |
| <input type="checkbox"/> -13 | Galvanized body                                      |
| <input type="checkbox"/> -15 | Extension                                            |
| <input type="checkbox"/> -21 | Secondary flat stainless steel strainer (2", 3", 4") |
| <input type="checkbox"/> -28 | Stainless steel body (Type 304)                      |
| <input type="checkbox"/> -30 | PVC socket connection body                           |
| <input type="checkbox"/> -31 | ABS socket connection body                           |
| <input type="checkbox"/> -32 | 2", 3", 4" integral deep seal trap                   |
| <input type="checkbox"/> -34 | Closure plug                                         |
| <input type="checkbox"/> -35 | S.S. mesh over bucket                                |
| <input type="checkbox"/> -40 | Underdeck clamp                                      |

| SUFFIX                              | OPTIONAL VARIATIONS                                         |
|-------------------------------------|-------------------------------------------------------------|
| <input type="checkbox"/> -41        | Sump receiver                                               |
| <input type="checkbox"/> -50        | Lacquered cast iron funnel                                  |
| <input type="checkbox"/> -90        | Threaded side outlet (2", 3", 4")                           |
| <input type="checkbox"/> -90NH      | No hub side outlet (2", 3", 4")                             |
| <input type="checkbox"/> -95        | Client logo                                                 |
| <input type="checkbox"/> -BA        | Buy American Act compliant product                          |
| <input type="checkbox"/> -C2        | High rough-in membrane clamp (min. 1 9/16" (40)             |
| <input type="checkbox"/> -F4        | 4" Round funnel                                             |
| <input type="checkbox"/> -F6        | 6" Round funnel                                             |
| <input type="checkbox"/> -G         | Oval 4" x 9" funnel                                         |
| <input type="checkbox"/> -HP        | Heel proof grate (1/4" maximum grate opening size, -3 only) |
| <input type="checkbox"/> -J         | 6" x 3" x 1" funnel                                         |
| <input type="checkbox"/> (Standard) | No hub outlet                                               |
| <input type="checkbox"/> -MG        | MI-GARD Floor Drain Trap Sealer (2", 3" or 4")              |
| <input type="checkbox"/> P          | Push on outlet                                              |
| <input type="checkbox"/> -PA        | Pennsylvania Steel Act compliant product                    |
| <input type="checkbox"/> T          | Threaded outlet (2", 3", 4")                                |
| <input type="checkbox"/> X          | Inside caulk outlet                                         |
| <input type="checkbox"/> -Z         | Extended wide elastomeric flange                            |

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_