

Location: _____




F1780

INDIRECT WASTE FUNNEL

Specification: MIFAB® Series F1780 lacquered cast iron indirect waste funnel.

Function: Used in hospitals and laboratories with indirect waste lines installed above the floor. The funnel will receive condensate, drip or waste water from the indirect waste lines. MIFAB's MI-950 deep seal trap connected to MIFAB's M-500 Series of trap seal primers are recommended for use with the F1780 to prevent sewer gases from entering the room.

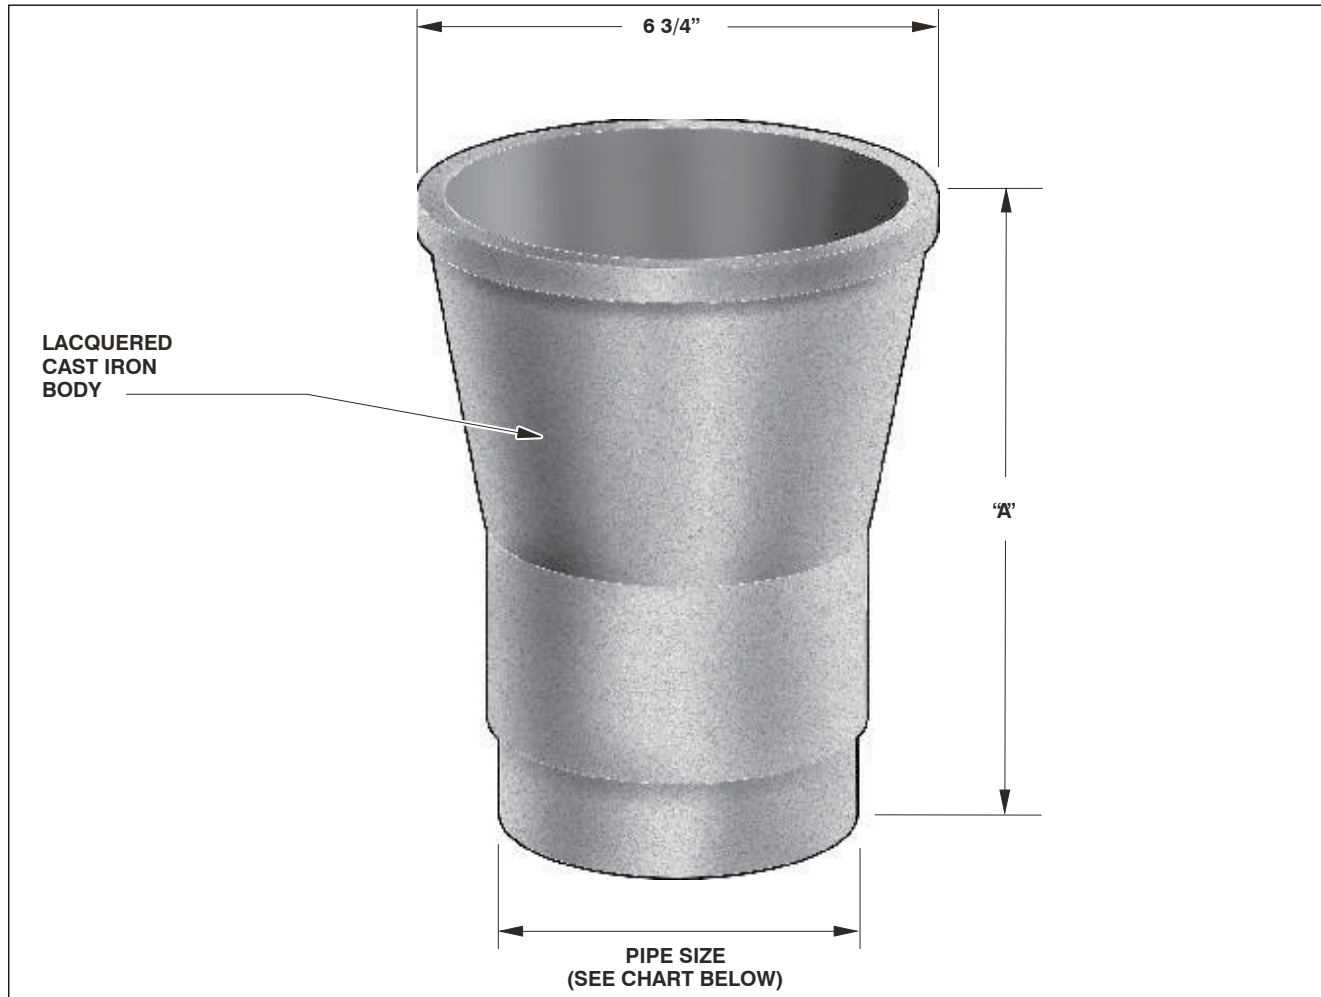

PIPE SIZE	BODY HEIGHT "A"		
	NO HUB (STANDARD)	PUSH ON (P)	PVC / ABS (-30) / (-31)
2" (51)	10" (254)	10 3/8" (263)	10 3/8" (263)
3" (76)	10" (254)	10 3/8" (263)	10 3/8" (263)
4" (102)	10" (254)	10 3/8" (263)	10 3/8" (263)
6" (152)	8 3/4" (222)	-	-

SUFFIX

OPTIONAL VARIATIONS

-11 Acid resistant epoxy coated body
 -13 Galvanized body
 -21 Secondary flat stainless steel strainer (2", 3", 4")
 -30 PVC socket connection body
 -31 ABS socket connection body

SUFFIX

OPTIONAL VARIATIONS

-BA Buy American Act compliant product
 (Standard) No hub outlet
 -MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
 P Push on outlet
 -PA Pennsylvania Steel Act compliant product

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____