

Location: _____




FS1760

**12" ROUND X 8" DEEP FLOOR AREA AND
INDIRECT SANITARY WASTE DRAIN**

Specification: MIFAB Series FS1760, 12" Round x 8" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior and loose set grate. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a large volume sanitary drain. Also suitable for indirect waste applications. The light duty grate is not recommended for foot traffic.

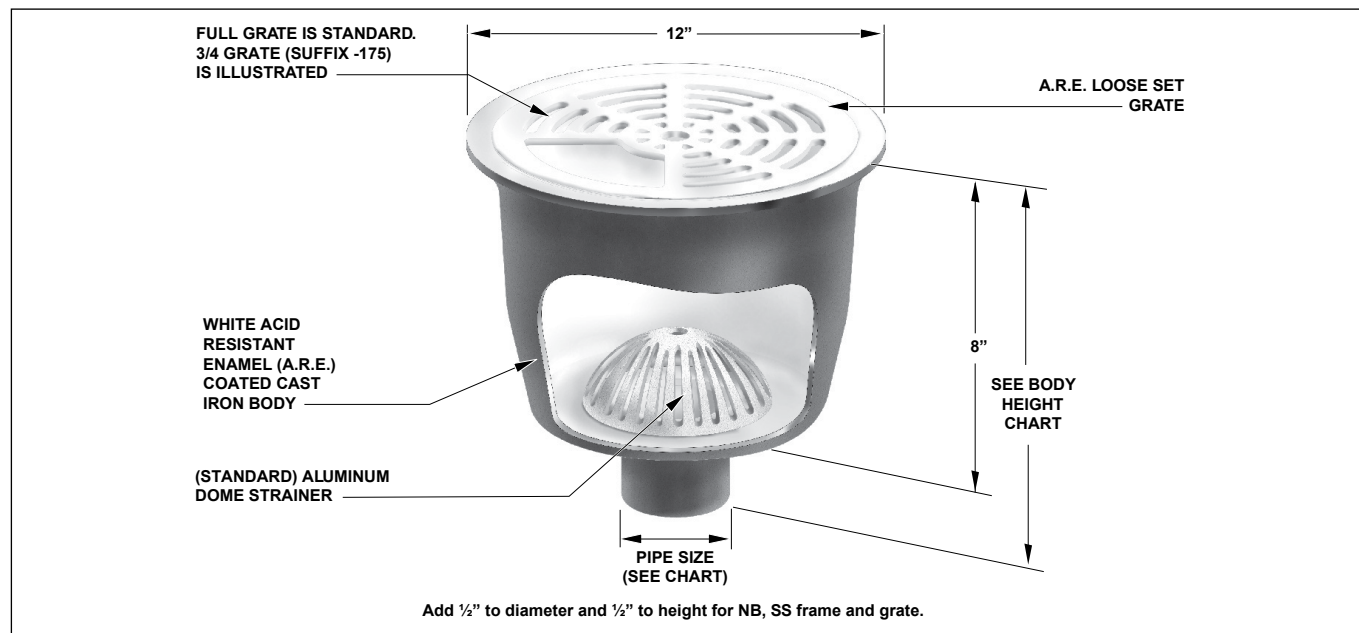

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
○ 2" (51)	□ 9 1/2" (241)	□ 10 5/8" (270)	□ *10 1/2" (267)	□ 10 5/8" (270)	□ *11 1/4" (286)
○ 3" (76)	□ *10 1/2" (267)	□ 10 5/8" (270)	□ *10 1/2" (267)	□ 10 5/8" (270)	□ *11 1/4" (286)
○ 4" (102)	□ 9 1/2" (241)	□ 10 5/8" (270)	□ *10 1/2" (267)	□ **10 5/8" (270)	□ *11 1/4" (286)

*Indicates outlet size and connection available with transition outlet body only.

**4" Inside Caulk Outlet body only available with -FL anchor flange Outlet sizes indicated by the *are available with the transition outlet body only.

SUFFIX	OPTIONAL VARIATIONS
□ -1	Nickel bronze frame and grate
□ -3	Stainless steel frame and grate
□ -5	Sediment bucket
□ -6	Security screws (1, -3 only, T-20 Torx and pin)
□ -7	1/2" trap seal primer connection
□ -8	Backwater valve (2", 3" or 4" only)
□ -21	Secondary flat stainless steel strainer
□ -22	Less grate
□ -30	PVC outlet
□ -31	ABS outlet
□ -32	Deep seal trap with flushing connection
□ -50	A.R.E. coated cast iron funnel
□ -51	2 1/2" round center hole in grate (-1, -3 only)
□ -69	Stainless steel sediment bucket
□ -83	Stainless steel mesh screen over sediment bucket
□ -90	Threaded side outlet
□ -90NH	No hub side outlet

SUFFIX	OPTIONAL VARIATIONS
□ -95	Client logo (-1, -3 only)
□ -150	1/2" PVC grate
□ -175	3/4" PVC grate
□ -BA	Buy American Act compliant product
□ (Standard)	No hub outlet
□ -C	Membrane Clamps
□ -F4	4" round funnel
□ -F6	6" round funnel
□ -FL	Anchor flange
□ -G	4" x 9" oval funnel
□ -J	3" x 1" oval funnel
□ -P	Push on outlet
□ -PA	Pennsylvania Steel Act compliant product
□ -T	Threaded outlet
□ X	Inside caulk outlet
□ -Z	Extended wide elastomeric flange (with -FL only)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____