

Location:



MIFAB®

R1300


**SCUPPER DRAIN WITH ANGLE GRATE
AND 90 DEGREE OUTLET**

Specification: MIFAB® R1300 6" x 11" lacquered cast iron scupper drain with 90 degree outlet, membrane clamp and sloped grate.

Function: To provide drainage from a roof surface horizontally where the roof and parapet meet. The angled grate prevents debris from blocking the drainage openings. Reverse outlet for 45 degree outlet connection. (R1310)


**45 DEGREE SLOPED
GRATE WITH 20 IN²
OF FREE AREA**

**2", 3", 4", OR 6"
(51, 76, 102, 152)
STANDARD NO HUB 90
DEGREE OUTLET
(REVERSIBLE TO FORM
45 DEGREE OUTLET - R1310)**

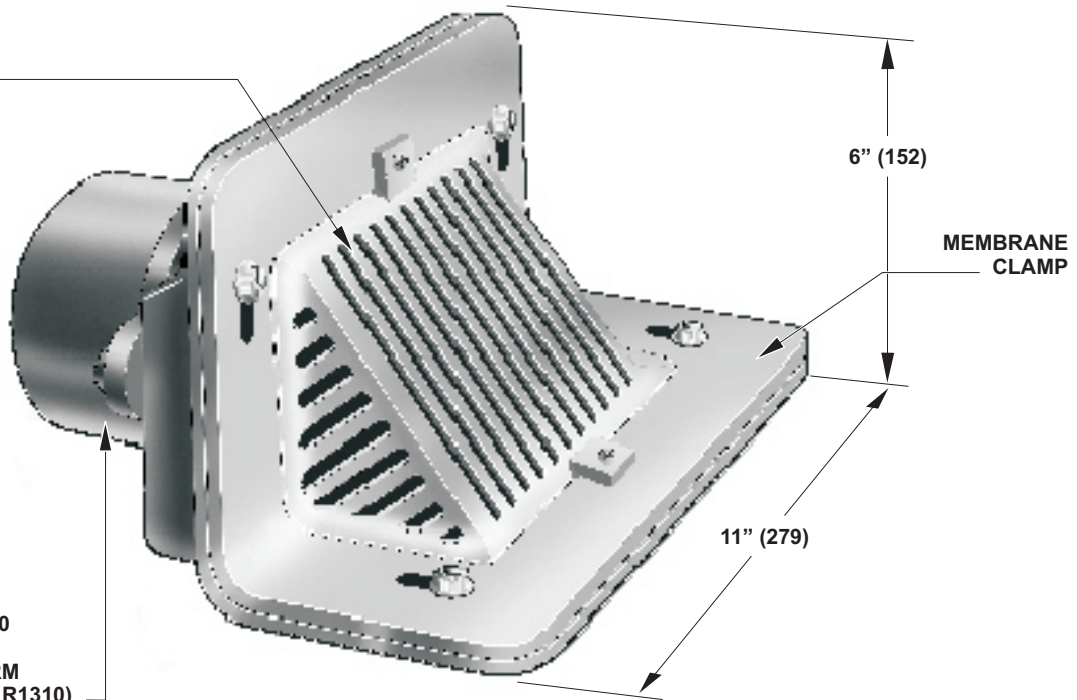

(Dimension) Denotes Millimetres

**R1300 Series Meets
ASME Roof Drain
Standard
A112.6.4-2003**

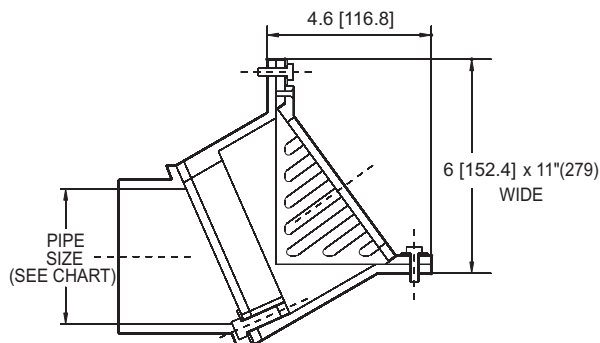

SUFFIX

- ☐ -1
- ☐ -6
- ☐ -11
- ☐ -13
- ☐ -83

OPTIONAL VARIATIONS:

- Nickel bronze frame and grate
- Vandal proof grate
- Acid resistant epoxy finish
- All galvanized
- Stainless steel mesh screen over grate

SUFFIX

- ☐ (Standard)
- ☐ -ARRA
- ☐ -BA
- ☐ -PA
- ☐ T

- No hub outlet
- ARRA (Stimulus Act) compliant product
- Buy American Act compliant product
- Pennsylvania Steel Act compliant product
- Threaded outlet (2", 3", 4")

Job Name:

Section No:

Schedule No:

Page No:

Contractor:

Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880