

Location: _____




F1230

**FLOOR DRAIN FOR
NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB® Series F1230 lacquered cast iron floor drain with standard (specify material finish), 5" (127) diameter strainer (specify material finish).

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas. Round strainer is used with all types of finished floors. Shallow depth body is ideal for shallow pour applications.

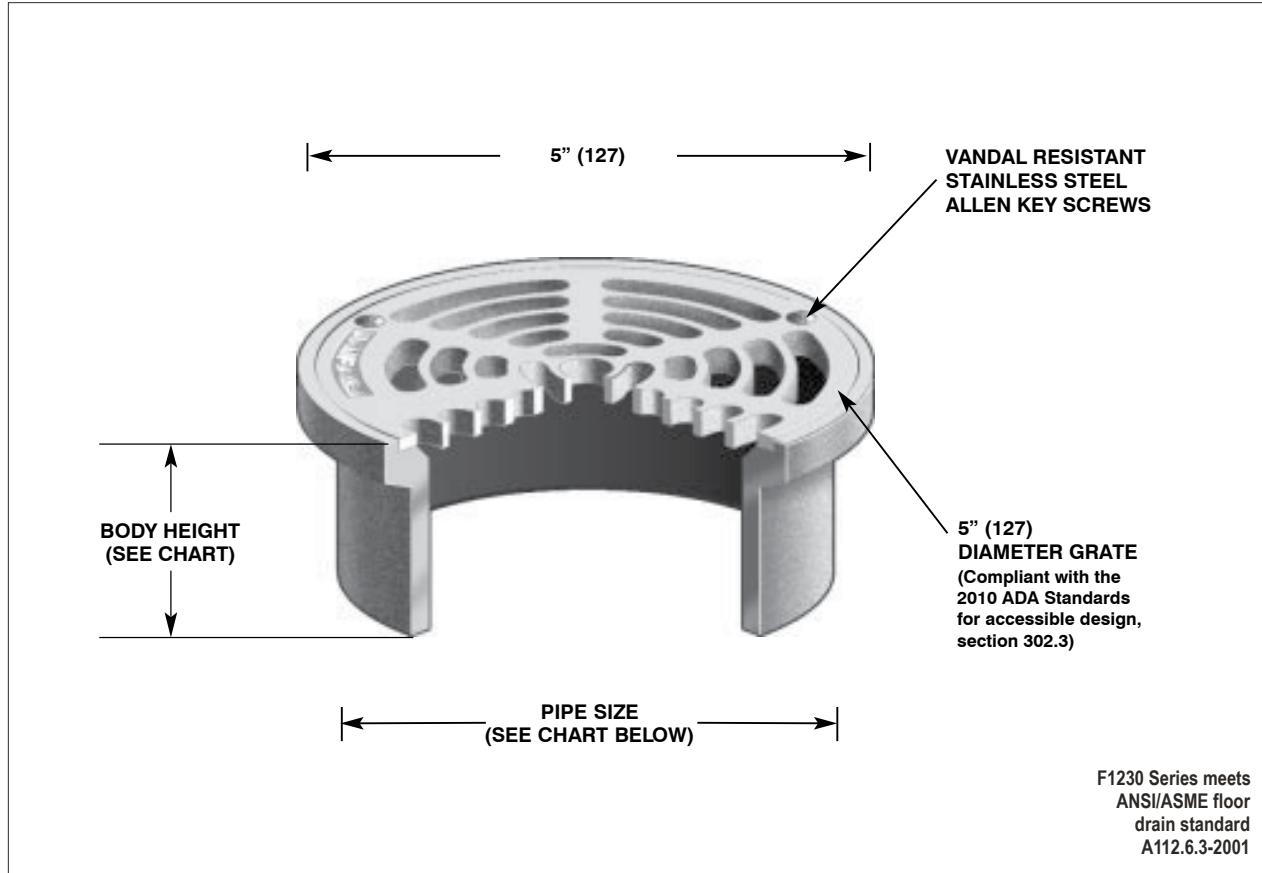

STRAINER DIAMETER	ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT		
	FREE AREA	LOAD RATING				CAST IRON BODY (-50)	NICKEL BRONZE BODY (-1)	PVC/ABS (-30)/(-31)
		N.B. (-1)	S.S. (-3)	D.I. (-4)				
5" (127)	8 in² (5200²)	UP TO 2,000 LBS.	5000-7499 LBS.	5,000-7,499 LBS.	2" (51)	2 ½" (64)	2 ½" (64)	2 15/16" (75)
					3" (76)	2 ½" (64)	2 ½" (64)	2 15/16" (75)
					4" (102)	2 ½" (64)	2 ½" (64)	2 15/16" (75)

SUFFIX OPTIONAL VARIATIONS

-1 Nickel bronze strainer
-2 Polished brass strainer (5" only)
-4 Ductile iron grate (5" x 8" only)
-5 Sediment bucket
-6 Security screws (T-20 Torx & pin)
-8 Backwater valve (2", 3", 4")
-11 Acid resistant epoxy coated body
-30 PVC socket connection body
-31 ABS socket connection body
-49 Chrome Plated Strainer
-50 Lacquered cast iron funnel

SUFFIX OPTIONAL VARIATIONS

-95 Client logo
-BA Buy American Act compliant product
-F4 4" Round funnel
-F6 6" Round funnel
-G Oval 4" x 9" funnel
-HP Heel proof grate (1/4" maximum grate opening size, -3 only)
-J 6" x 3" x 1" funnel
-MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-PA Pennsylvania Steel Act compliant product

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____