

Location: _____




FS1740

**12" X 12" X 10" FLOOR AREA AND
INDIRECT SANITARY WASTE DRAIN**

Specification: MIFAB Series FS1740, 12" x 12" x 10" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior and light duty loose set grate. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a large volume sanitary drain. Also suitable for indirect waste applications.

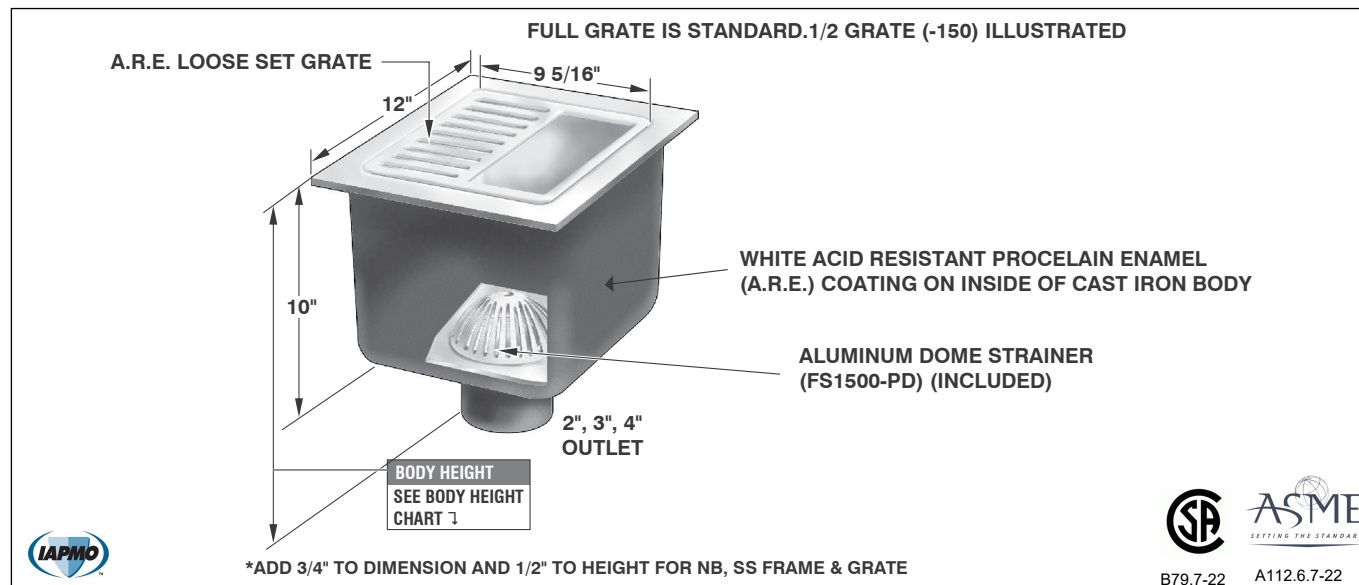

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
2" (51)	11 1/2" (292)	11 1/2" (292)	*12 1/2" (318)	*14" (356)	*13 1/4" (337)
3" (76)	11 1/2" (292)	11 1/2" (292)	*12 7/8" (327)	*14" (356)	*13 1/4" (337)
4" (102)	*12 1/2" (318)	11 1/2" (292)	*12 7/8" (327)	**12 5/8" (321)	*13 1/4" (337)

*Indicates outlet size and connection available with transition outlet body only. **4" Inside Caulk Outlet body only available with -FL anchor flange. Outlet sizes indicated by the * are available with the transition outlet body only.

Suffix	Description		
-1	Full NB grate and frame	-90	Threaded side outlet
-3	Full SS grate and frame	-90NH	No hub side outlet
-5	Sediment bucket (FS1700-PB)	-95	Client logo (-1, -3 only)
-6	Security screws (H-1039A, 4 pcs) (-1, -3 only)	-150	1/2 grate
-7	Trap seal primer connection	-175	3/4 grate
-8	Backwater Valve (BV1250 Series) (2", 3", 4")	-BA	Buy American Act compliant product
-9	Hinged grate (-3 only)	-PA	Pennsylvania Steel Act compliant product
-21	Secondary flat strainer (FD-9600 Series)	-F4	4" round funnel
-22	Less grate	-F6	6" round funnel
-30	PVC socket connection W/A.R.E. Body (2", 3", 4")	-G	4" x 9" oval funnel
-31	ABS socket connection W/A.R.E. body (2", 3", 4")	-J	3" x 1" oval funnel
-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	P	Push on outlet (2", 3" or 4")
-50	A.R.E. coated cast iron funnel	(Standard)	No hub outlet
-51	2 1/2" round center hole in grate (-1, -3 only)	T	Threaded outlet (2", 3" or 4")
-69	Stainless steel sediment bucket (FS1500-PB-3)	X	Inside caulk outlet (2", 3" or 4")
-83	Stainless steel mesh screen over sediment bucket (add to S.S. Bucket)	-Z	Extended wide elastomeric flange (with -FL only)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____