

Location: **STR****BRONZE STRAINERS -LL**

Specification: The "Y" type strainer shall be a bronze body strainer with a brass cap and a stainless steel mess screen. The valve shall be designed so the screen can be cleaned without removal of the valve from the pipe line and shall be equipped with an enclosure plug in the brass clean out cap for the addition of a test gauge or secondary water line.

Ratings:

Maximum Working Pressure: 400 P.S.I. (27.6 bar) WOG @ 210° F (99° C)



Materials:

Bronze Body: Standard UNS-C84400

Retainer Cap: Brass

Cap Gasket: NBR

Standard Screen: 304 Stainless Steel 20 Mesh

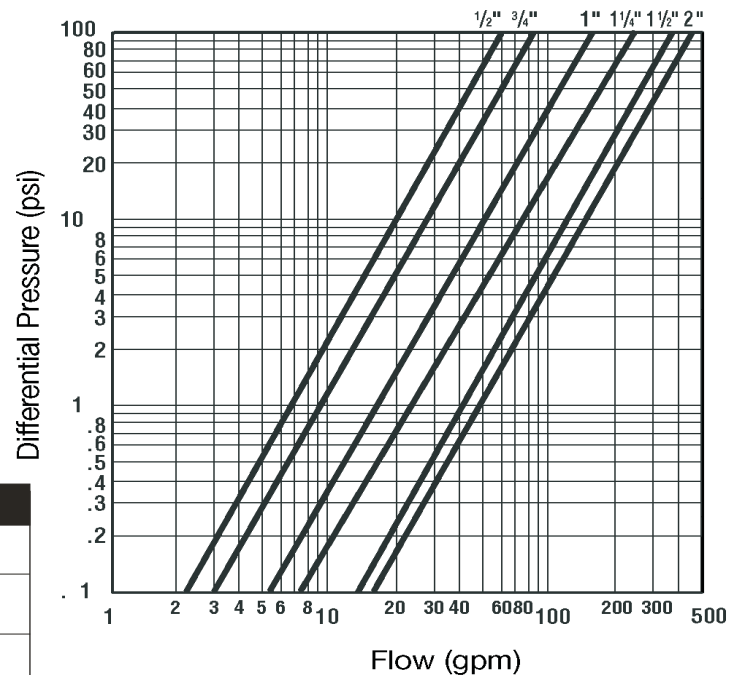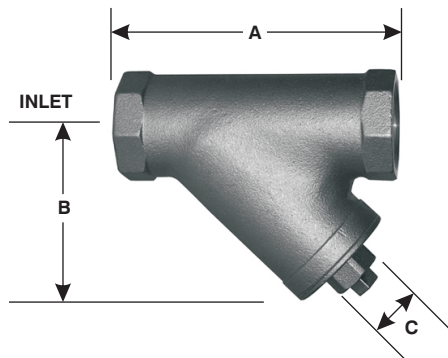

Model No.	STR-SWT	A	B	C
○ STR.50-SWT-BRZ-LL	1/2" (13)	2 3/4" (70)	1 1/4" (35)	1/4" (6)
○ STR.75-SWT-BRZ-LL	3/4" (19)	3 3/8" (86)	1 1/2" (43)	1/4" (6)
○ STR1.00-SWT-BRZ-LL	1" (25)	3 3/4" (95)	2 1/4" (54)	1/2" (13)
○ STR1.25-SWT-BRZ-LL	1 1/4" (32)	4 1/2" (115)	2 1/2" (65)	1/2" (13)
○ STR1.50-SWT-BRZ-LL	1 1/2" (40)	5 1/4" (135)	3" (76)	3/4" (19)
○ STR2.00-SWT-BRZ-LL	2" (51)	6 3/16" (157)	3 1/2" (90)	1" (25)

Model No.	STR-IPS	A	B	C
○ STR.50-IPS-BRZ-LL	1/2" (13)	2 3/4" (70)	1 1/4" (35)	1/4" (6)
○ STR.75-IPS-BRZ-LL	3/4" (19)	3 1/4" (80)	1 1/2" (43)	1/4" (6)
○ STR1.00-IPS-BRZ-LL	1" (25)	3 3/4" (95)	2 1/4" (54)	1/2" (13)
○ STR1.25-IPS-BRZ-LL	1 1/4" (32)	4 1/2" (115)	2 1/2" (65)	1/2" (13)
○ STR1.50-IPS-BRZ-LL	1 1/2" (40)	5" (127)	3" (76)	3/4" (19)
○ STR2.00-IPS-BRZ-LL	2" (51)	6" (152)	3 1/2" (90)	1" (25)

Job Name: Section No: Schedule No: Page No: Contractor: Purchase Order No:

BEECO reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.beecobackflow.com CAN: 1-800-387-3880

2012-07-25