



"NVENT CADDY SUPERFIX 454 STANDARD DUTY, 3.976"–4.173" OD, 3 1/2" PIPE, 4" COPPER TUBE"

CATALOG NUMBER

454016



FEATURES

Recommended for the suspension of stationary non-insulated pipe lines

Easy-to-close clamp for steel pipe and copper tube

Unique hinged design eliminates the need to disassemble the clamp prior to installation

Clamp can be closed with one hand, without ever turning a screw

All-steel design of the closing mechanism retains strength even when exposed to heat

"Comes with a welded 3/8" cap nut, allowing easy attachment to threaded rod"

Combo head bolt works with slotted, hex, or Phillips drivers

Conforms with Manufacturers Standardization Society (MSS) SP-58 (Type 12)

Category II noise reduction according to DIN EN ISO 3822-1

Compliant for sound insulation design according to DIN 4109

"Reaction-to-fire classification is ""E"" in compliance with DIN EN 13501-1"

PRODUCT ATTRIBUTES

Material: Steel; EPDM-SBR Rubber

Finish: Electrogalvanized

Temperature: -58 to 230 °F

Outer Diameter: 3.98 – 4.17"

Pipe Size: 3 1/2"

Copper Tube Size: 4"

Rod Size: 3/8"


B: 1 1/8"

Static Load: 300 lb

ADDITIONAL PRODUCT DETAILS

Lining is EPDM rubber.

DIAGRAMS

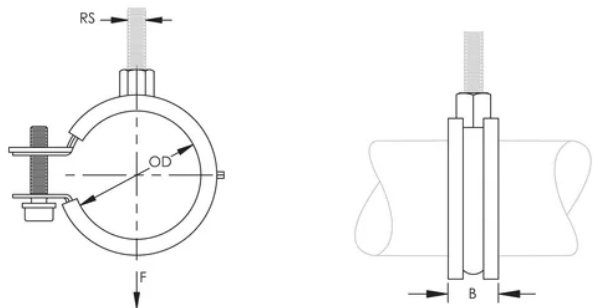

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



Our powerful portfolio of brands:
nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF
TRACER