

SMITH-COOPER[®]

I N T E R N A T I O N A L

Steel Nipples and Brass Nipples

Welded Sch 40 & Sch 80 Specifications

-  branded
- Black and hot-dipped galvanized steel pipe used conforms to ASTM A53
- Canadian Registration Numbers available at www.smithcooper.com
- Welded steel nipples conform to ASTM A733
- NPT threads on nipples conform to ASME B1.20.1
- Manufacturing facility is ISO 9001:2008 and ISO 14001
- Import nipples have SCI Trademark and tracking number
- Domestic nipples available upon request
- Galvanized nipples are certified to; NSF/ANSI 61-4 and California AB1953 Lead Free

Seamless Sch 40, Sch 80, and XXH Specifications

-  branded
- Seamless steel pipe used conforms to ASTM A106 Grade B
- Canadian Registration Numbers available at www.smithcooper.com
- Seamless steel nipples conform to ASTM A733
- NPT threads on nipples conform to ASME B1.20.1
- Manufacturing facility is ISO 9001:2008 and ISO 14001
- Import nipples have SCI trademark and heat number
- Domestic nipples available upon request

Seamless Sch 40 Red Brass Specifications

-  Branded
- Canadian Registration Numbers available at www.smithcooper.com
- Seamless brass pipe conforms to ASTM B43
- Seamless brass nipples conform to ASTM B687
- NPT threads on nipples conform to ASME B1.20.1
- Certified to CA AB1953 Lead Free

* Special ends finishes and lengths available upon request

Fig. 73NI8 Black Schedule 80 Carbon Steel Pipe Nipples

Size IN	Close Length	Weight per Each (LB)																
		Packing (Inner/Master)																
		Close	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	7	8	9	10	11	12
1/8	3/4	0.02	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.12	0.14	0.16	0.18	0.20	0.22	0.25	0.27	0.30
		25/400	25/400	25/400	25/400	25/400	25/400	25/400	25/400	25/400	25/400	25/400	25/400	25/300	25/200	25/200	25/200	25/200
1/4	7/8	0.03	0.05	0.08	0.10	0.13	0.15	0.17	0.19	0.21	0.24	0.27	0.31	0.35	0.39	0.43	0.45	0.48
		25/400	25/400	25/400	25/400	25/400	25/400	25/300	25/300	25/300	25/200	25/200	25/150	25/150	25/150	25/100	25/100	25/100
3/8	1	0.05	0.08	0.10	0.15	0.18	0.21	0.24	0.27	0.31	0.33	0.37	0.43	0.47	0.53	0.59	0.64	0.70
		25/400	25/400	25/400	25/400	25/300	25/300	25/200	25/200	25/200	25/150	25/150	25/150	25/100	25/100	25/100	25/100	25/75
1/2	1-1/8	0.08	0.11	0.15	0.20	0.24	0.29	0.35	0.39	0.42	0.49	0.52	0.60	0.71	0.73	0.89	0.99	1.05
		25/400	25/400	25/400	25/300	25/200	25/200	25/150	25/150	25/150	25/100	25/100	25/100	25/75	25/75	25/50	25/50	25/50
3/4	1-3/8	0.14	0.16	0.22	0.28	0.34	0.40	0.46	0.53	0.59	0.65	0.71	0.83	0.96	1.09	1.21	1.34	1.46
		25/400	25/400	25/200	25/200	25/150	25/150	25/100	25/100	25/100	25/75	25/75	25/75	25/50	25/50	25/50	20/40	20/40
1	1-1/2	0.21		0.31	0.39	0.48	0.58	0.67	0.76	0.86	0.96	1.05	1.26	1.43	1.62	1.80	2.02	2.18
		25/200		25/200	25/150	25/100	25/100	25/75	25/75	25/50	25/50	25/50	25/50	20/40	20/40	15/30	15/30	15/30
1-1/4	1-5/8	0.31		0.42	0.55	0.65	0.79	0.92	1.06	1.18	1.31	1.43	1.67	1.84	1.54	2.47	2.72	2.99
		25/150		25/100	25/100	25/75	25/50	25/50	25/50	25/50	20/40	20/40	15/30	15/30	15/30	- /20	- /20	- /20
1-1/2	1-3/4	0.41		0.49	0.63	0.77	0.94	1.08	1.25	1.38	1.59	1.71	2.04	2.34	2.63	2.88	3.33	3.57
		25/100		25/100	25/50	25/50	25/50	25/50	- /50	- /40	- /32	- /32	- /25	- /20	- /20	- /10	- /10	- /10
2	2	0.66			0.89	1.09	1.29	1.51	1.77	1.99	2.24	2.35	2.01	3.17	3.59	4.00	4.40	4.90
		25/50			25/50	- /50	- /25	- /25	- /25	- /25	- /25	- /25	- /18	- /18	- /15	- /12	- /12	- /12
2-1/2	2-1/2	1.19				1.49	1.74	2.05	2.37	2.67	2.98	3.33	3.89	4.61	5.21	5.91	6.50	7.17
		- /36				- /36	- /27	- /27	- /24	- /18	- /18	- /18	- /14	- /12	- /9	- /9	- /9	- /8
3	2-5/8	1.75				2.05	2.47	2.90	3.25	3.74	4.15	4.50	5.29	6.27	7.39	8.00	9.76	10.64
		- /24				- /24	- /18	- /18	- /16	- /12	- /12	- /12	- /9	- /8	- /8	- /6	- /6	- /6
3-1/2	2-3/4	2.61						3.79	4.26	4.74	5.22	5.69	6.64	7.59	8.54	9.49	10.44	11.38
		- /15						- /12	- /10	- /8	- /8	- /8	- /5	- /5	- /4	- /4	- /4	- /4
4	2-7/8	2.84						4.12	4.71	5.44	6.07	6.31	8.04	9.18	10.33	11.48	12.63	13.77
		- /15						- /12	- /10	- /8	- /8	- /8	- /5	- /5	- /4	- /4	- /4	- /4

Fig. 73SR8 Schedule 80 Single-Run Assortments Thru 6"

Size IN	Part Number Black	Package Contents of Each Nipple Size											Total Pieces	Weight LB
		Close	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6		
1/2	73SR8004C	1	1	1	1	1	1	1	1	1	1	1	11	3
3/4	73SR8006C	1	1	1	1	1	1	1	1	1	1	1	11	5
1	73SR8010C	1		1	1	1	1	1	1	1	1	1	10	7
1-1/4	73SR8012C	1		1	1	1	1	1	1	1	1	1	10	9
1-1/2	73SR8014C	1		1	1	1	1	1	1	1	1	1	10	11
2	73SR8020C	1		1	1	1	1	1	1	1	1	1	9	13
2-1/2	73SR8024C	1				1	1	1	1	1	1	1	8	18
3	73SR8030C	1				1	1	1	1	1	1	1	8	25
4	73SR8040C	1						1	1	1	1	1	6	30

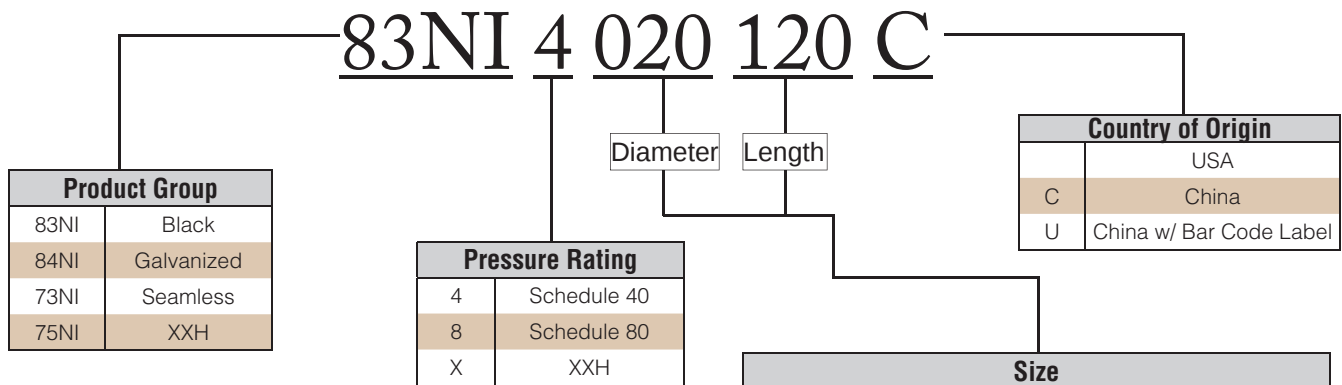


Fig. 75NIX Black XXH Carbon Steel Pipe Nipples

Size IN	Close Length	Weight per Each (LB)																
		Packing (Inner/Master)																
		Close	1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	7	8	9	10	11	12
1	1-1/2	0.47 -/100		0.62 -/100	0.76 -/75	0.93 -/50	1.08 -/50	1.22 -/40	1.37 -/40	1.54 -/25	1.69 -/25	1.84 -/25	2.13 -/25	2.44 -/20	2.75 -/20	3.05 -/15	3.36 -/15	3.66 -/15
2	2	1.52 -/25			1.89 -/20	2.27 -/10	2.64 -/15	3.01 -/10	3.39 -/10	3.77 -/10	4.15 -/5	4.53 -/10	5.28 -/5	6.02 -/5	6.78 -/5	7.54 -/5	8.29 -/5	9.04 -/5
2-1/2	2-1/2	2.93 -/18				3.55 -/18	4.09 -/13	4.67 -/13	5.25 -/13	5.84 -/9	6.43 -/9	6.96 -/9	8.12 -/7	9.28 -/6	10.45 -/4	11.61 -/4	12.76 -/4	13.93 -/4
3	2-5/8	4.16 -/12				4.17 -/12	5.55 -/9	6.33 -/9	7.13 -/8	7.93 -/6	8.72 -/6	9.56 -/6	12.39 -/4	14.16 -/4	15.49 -/4	17.70 -/4	18.58 -/3	21.24 -/3
4	2-7/8	2.84 -/15						9.00 -/12	10.13 -/10	11.25 -/8	12.38 -/8	13.55 -/8	16.13 -/5	18.43 -/5	20.71 -/4	23.00 -/4	25.30 -/4	27.60 -/4



Steel Nipple Part Numbers



Wall Thickness Chart

Nom/Inal Pipe Size	Outside Diameter	Sch 40 Wall Thickness	Sch 80 Wall Thickness	XXH Wall Thickness
1/8	0.405	0.068	0.095	N/A
1/4	0.540	0.088	0.119	N/A
3/8	0.675	0.091	0.126	N/A
1/2	0.840	0.109	0.147	N/A
3/4	1.050	0.113	0.154	N/A
1	1.315	0.133	0.179	0.358
1-1/4	1.660	0.140	0.191	0.382
1-1/2	1.900	0.145	0.200	0.400
2	2.375	0.154	0.218	0.436
2-1/2	2.875	0.203	0.276	0.552
3	3.500	0.216	0.300	0.600
3-1/2	4.000	0.226	0.318	N/A
4	4.500	0.237	0.337	0.674
5	5.563	0.258	0.375	N/A
6	6.625	0.280	0.432	N/A
8	8.625	0.322	0.500	N/A

Size					
001	1/8	016	1-3/4	090	9
002	1/4	020	2	100	10
003	3/8	024	2-1/2	110	11
004	1/2	030	3	120	12
006	3/4	034	3-1/2	180	18
007	7/8	040	4	240	24
010	1	044	4-1/2	300	30
011	1-1/8	050	5	360	36
012	1-1/4	054	5-1/2	480	48
013	1-3/8	060	6	600	60
014	1-1/2	070	7	720	72
015	1-5/8	080	8		